

## BEFORE YOU BEGIN

### HOW TO USE THESE INSTRUCTIONS

All information in these instructions is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

### NOTES

- Drain shroud conceals drain for console tables.
- Shut off the main water supply.
- Observe all local plumbing codes.

### REQUIRED TOOLS AND MATERIALS


- Adjustable or open end wrench
- Strap wrench

## DRAIN SHROUD INSTALLATION

Install pop-up drain per manufactures instructions.

Slide drain shroud with slot facing toward the back, up over tailpiece and around ball lever rod, until contact with locknut on pop-up drain.

At this point, p-trap must be installed to hold drain shroud in position.

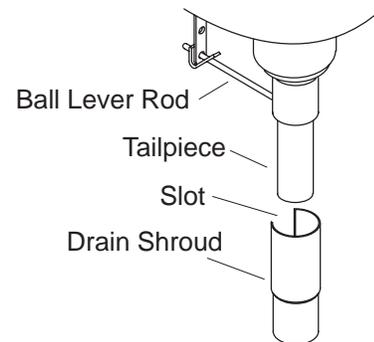


## P-TRAP INSTALLATIONS

**K-9018** with 1-1/4" O.D. inlet, and 1-1/4" O.D. outlet. Intended for console table installations.

Insert tube into drain outlet and connect with nut and gasket (not supplied). Slide flange back to wall, to cover the drain outlet.

Place trap nut and gasket onto tailpiece. Slide trap over tailpiece and tube elbow. Tailpiece must extend 1" to 2" into trap. Tailpiece may have to be cut to fit. Tighten nuts and gaskets.

Cleanout plug is used to remove any debris which has fallen into the trap.

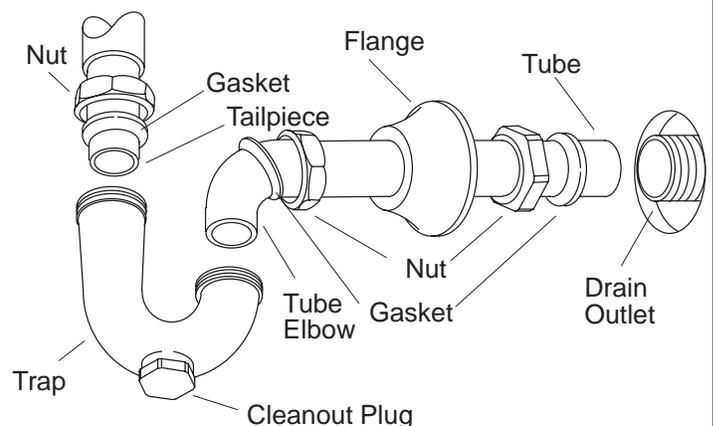


**K-9020** with 1-1/4" O.D. inlet, and 1-1/4" N.P.T. outlet.

Thread end of tube into drain outlet. Slide flange back to wall, to cover the drain outlet. Insert other end of tube into elbow and connect with nut and gasket.

Place trap nut and gasket onto tailpiece. Slide trap over tailpiece and into elbow. Tailpiece must extend 1" to 2" into trap. Tailpiece may have to be cut to fit. Tighten nuts and gasket.

Cleanout plug is used to remove any debris which has fallen into the trap.

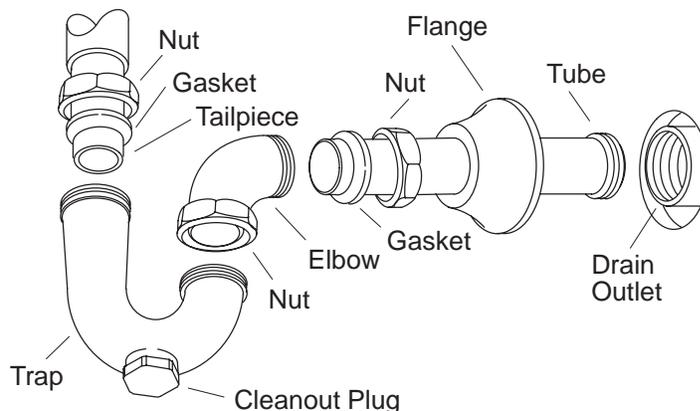


**K-9021** with 1-1/4" O.D. inlet, and 1-1/2" N.P.T. outlet.

Thread end of tube into drain outlet. Slide flange back to wall, to cover the drain outlet. Insert other end of tube into elbow and connect with nut and gasket.

Place trap nut and gasket onto tailpiece. Slide trap over tailpiece and into elbow. Tailpiece must extend 1" to 2" into trap. Tailpiece may have to be cut to fit. Tighten nuts and gasket.

Cleanout plug is used to remove any debris which has fallen into the trap.

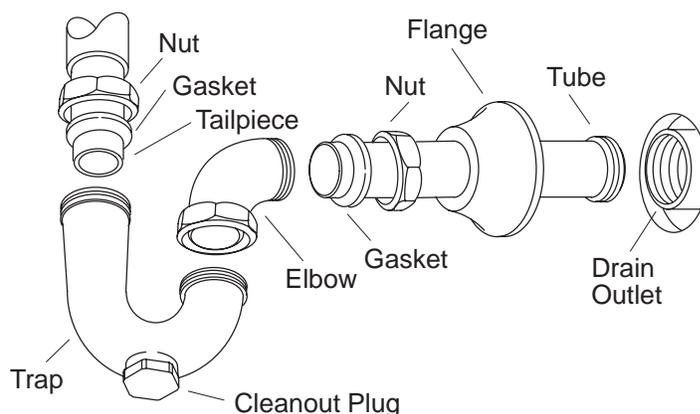


**K-9022** with 1-1/2" O.D. inlet, and 1-1/2" N.P.T. outlet.

Thread end of tube into drain outlet. Slide flange back to wall, to cover the drain outlet. Insert other end of tube into elbow and connect with nut and gasket.

Place trap nut and gasket onto tailpiece. Slide trap over tailpiece and into elbow. Tailpiece must extend 1" to 2" into trap. Tailpiece may have to be cut to fit. Tighten nuts and gasket.

Cleanout plug is used to remove any debris which has fallen into the trap.

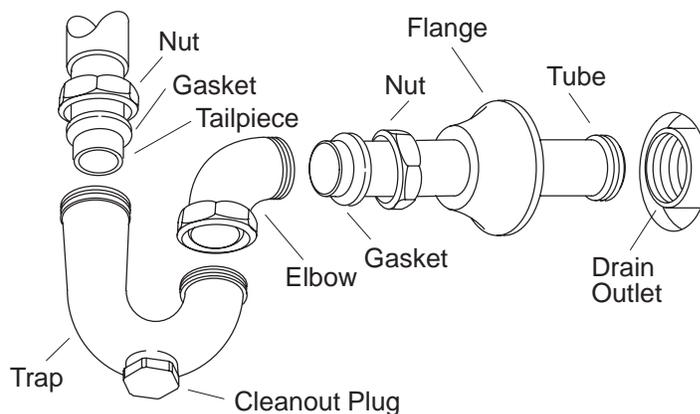

## INSTALLATION CHECKOUT

Turn water supplies on and run water through drain to check for leaks at all P-trap connections.