

## Product Information

Applicable product:			
Cube VibrAcoustic bath	K-1969-VB		
Cube VibrAcoustic bath with chromatherapy	K-1969-VBC		
Fixture*:			
Bathing well:			
Basin area, bottom	39-3/8" (1000 mm) x 39-3/8" (1000 mm)		
Basin area, top	44-5/8" (1134 mm) x 44-5/8" (1134 mm)		
Weight	115 lbs (52.2 kg)		
To overflow:			
Water depth	27-1/2" (699 mm)		
Capacity	171 gal (647.3 L)		
* Approximate measurements for comparison only.			
Drop-in cut-out		47" (1194 mm) x 47" (1194 mm)	
Amplifier/control:	Power per channel (rms) W	V	Hz
	15	120	50/60

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Amplifier/control: 120 V, 15 A, 50/60 Hz

## Installation Notes

Install this product according to the installation guide.

The bath is intended for under-mount/drop-in installation.

Control amplifier fits 16" (406 mm) center studs.

A grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier.

Cables are included, 25' (7.6 m) each.

Four access panels are required for servicing the bath.


Floor support under bath must provide for a minimum of 97.9 lbs/square foot (478.2 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

Fixture conforms to CSA B45.5/IAPMO Z124. All dimensions are nominal.


### Access Panels

30" (762 mm) L x 15" (381 mm) H Min

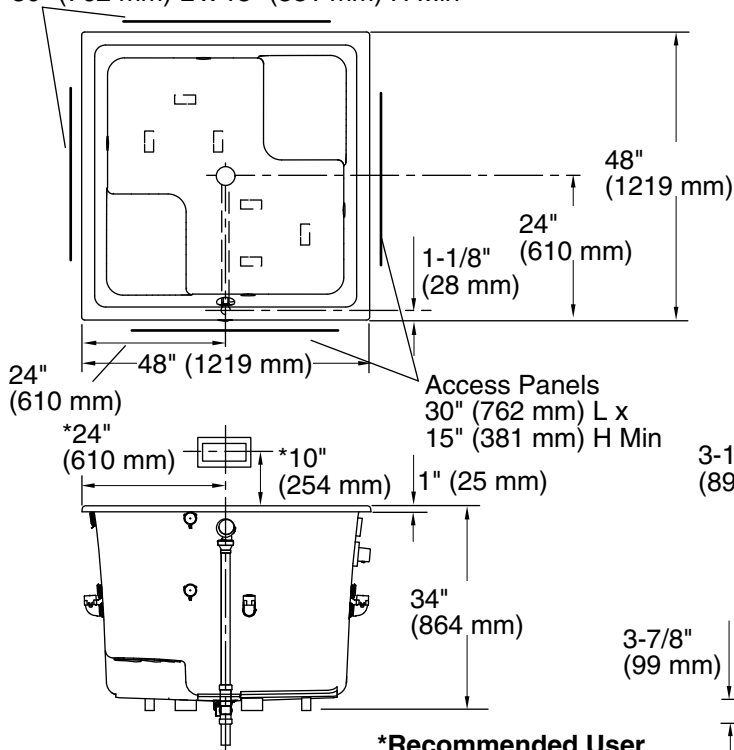


**\*Recommended User Interface Location**

No change in measurements if connected with drain illustrated. (K-8150)

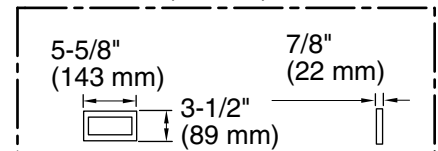

### User Interface

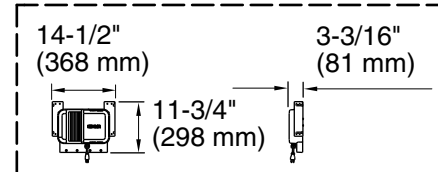

### Control Amplifier

