

Product Information

Applicable product:					
Drop-in bath with Bask heated surface			K-1184-W1		
Fixture*:					
Bathing well:					
Basin area, bottom		42" (1067 mm) x 20" (508 mm)			
Basin area, top		51" (1295 mm) x 24" (610 mm)			
Weight		80 lbs (36.3 kg)			
To overflow:					
Water depth		14" (356 mm)			
Capacity		60 gal (277.1 L)			
* Approximate measurements for comparison only.					
Recommended accessories:					
Pop-up bath drain OR			K-7161-AF		
Cable drain with PVC tee and pipe OR			K-7213		
Cable drain without PVC tee and pipe OR			K-7214		
Toe-tap bath drain			K-7265		
Heater:		W	V	HZ	A
		65	120	60	1.1

Installation Notes

Install this product according to the installation guide.



Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box.

40" (1016 mm) cable is included.

Floor support under bath must provide for a minimum of 41 lbs/square foot (202 kg/square meter) loading.

Fixture conforms to CSA B45.5/IAPMO Z124. All dimensions are nominal.

No change in measurements if connected with drain illustrated. (K-7161-AF)

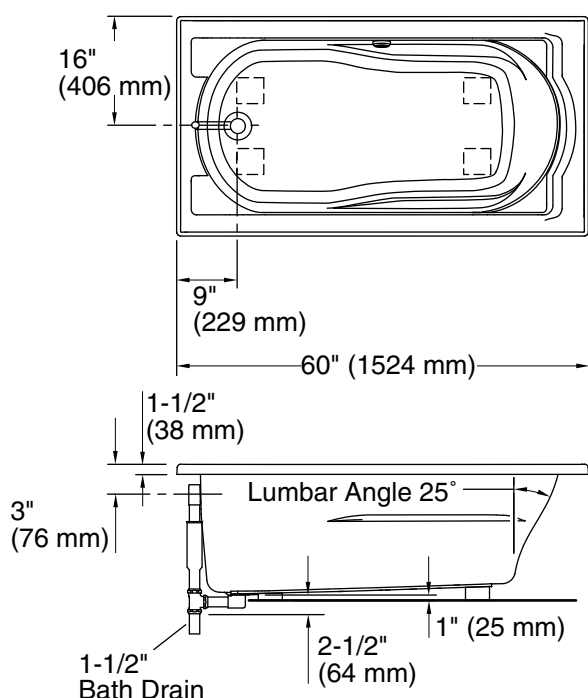

Access Panel
30" (762 mm) L x
15" (381 mm) H Min

