

### Product Information

Applicable products:	
5.5' Bubblemassage bath with integral apron – left drain (shown)	K-1224-GLA
5.5' Bubblemassage bath with integral apron – right drain	K-1224-GRA

Fixture*:	
Bathing well:	
Basin area, bottom	48" (1219 mm) x 24" (610 mm)
Basin area, top	59" (1499 mm) x 30" (762 mm)
Weight	109 lbs (49.4 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	67 gal (253.6 L)
* Approximate measurements for comparison only.	

Blower motor:	Heater	V	Hz	A
	300 W	120	60	5

### Required Electrical Service


Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor:	120 V, 15 A, 60 Hz
Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord.	

### Installation Notes

Install this product according to the installation guide.


Floor support under the bath must provide for a minimum of 42 lbs/square foot (205.1 kg/square meter) loading.

Fixture conforms to tolerances in CSA B45.5/IAPMO Z124. All dimensions are nominal.

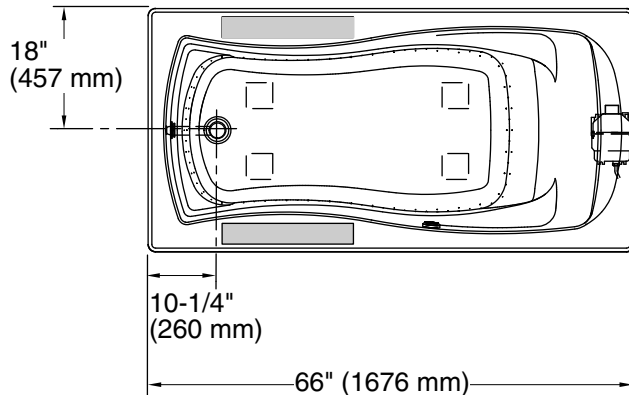

No change in measurements with drain shown. (K-7166-AF)

■ Recommended faucet area.



**Integral Flange Detail**

