# 

## Specifications

#### **FAUCET DESCRIPTION**

- Chrome plated solid brass body
- Single mount faucet
- Optional deck plate to accommodate installations with 3 mounting holes, 4" on center (outside holes)

#### **OPERATION**

- Adjustable infrared sensor
- (range, turn off delay and obstruction delay)Temperature controlled by mixing valve
- or mixing tee (optional) • Battery powered (AC optional)
- FLOW
- Supplied with vandal resistant 0.5 gpm (1.9 L/min) aerator (with key)

#### VALVES


- In-line filter included
- Slow close solenoid valve

#### **STANDARDS**

• Third party certified by IAPMO and CSA to meet ASME A112.18.1M and all applicable specifications referenced therein and complies with the requirements of ANSI A117.1


### WARRANTY

5 year warranty



Single Deck-Mount, Non-Mixing, Battery Powered Electronic Faucet

#### Model: 8302

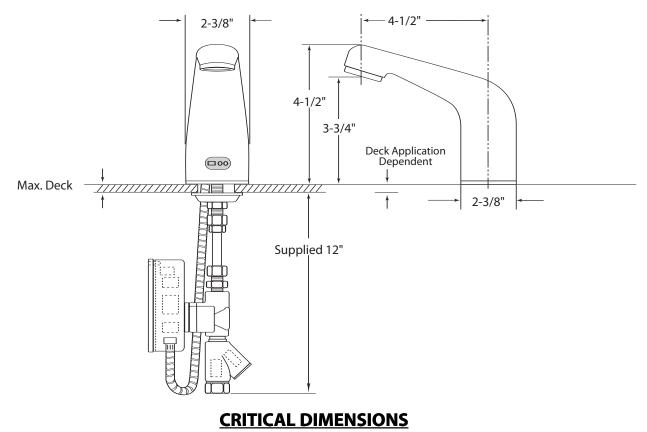

(DO NOT SCALE)