

DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design
- 3 function transfer valve
- Contains: hand-held shower with non-positive pause, 69" metal hose, 30" slide bar, drop ell, vacuum breaker and tub filler
- **Slide bar is NOT DESIGNED TO BE A GRAB BAR**
- Applicable components are supplied with vandal resistant screws

OPERATION

- Temperature and transfer valves both have ADA compliant lever style handles
- Temperature handle operates counterclockwise through a 270° arc with off at 6 o'clock, and the maximum hot at the 9 o'clock position
- Adjustable temperature limit stop
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3.6^\circ$
- Transfer valve operates 3 distinct functions

FLOW

- 2.5 gpm (9.5L/min) hand-held shower

CARTRIDGE

- Pair with a brass Posi-Temp rough-in valve:
- 8370HD*: 1/2" CC connection without integral stops
- 8371HD*: 1/2" CC connection with integral stops
- 8372HD*: 1/2" IPS connection with integral stops
- 8373HD*: 1/2" PEX connection with integral stops
- 8374HD*: 1/2" CPVC connection with integral stops
- 8375HD*: 1/2" UPONOR connection with integral stops
- *Includes the 1222HD Brass Posi-Temp Cartridge
- Also requires the 3360 3 function transfer rough-in valve
- Accommodates back to back installations


STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

- **ADA** for lever handles


WARRANTY

- Warranted for 5 years against material or manufacturing defects

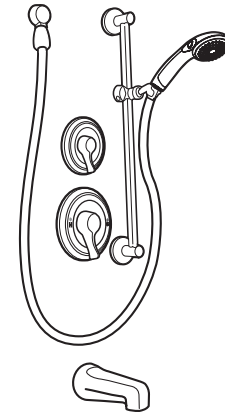

Single-Handle Posi-Temp Tub/Shower System Trim Only (With 3 Function Transfer Valve)

Model: T8341

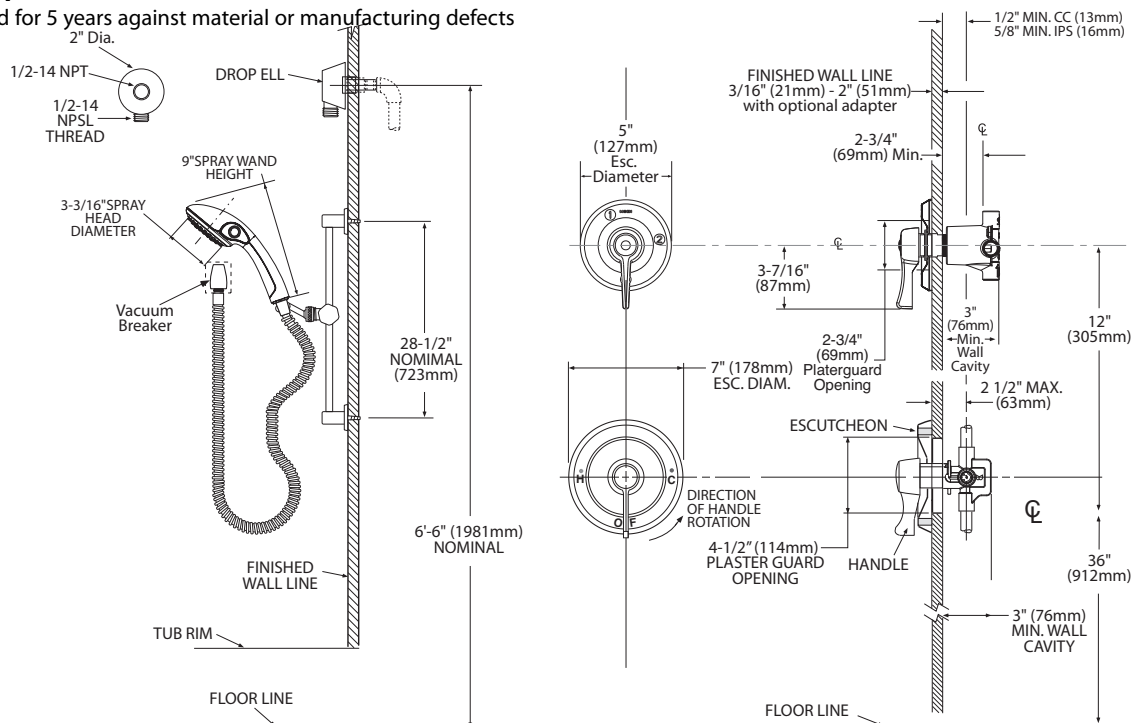

NOTE: This valve is not intended to be used as a shut-off valve. To prevent the potential of cross flow, check valves must be integral to the supply valve or installed in both hot and cold water supply lines.
*Refer to (ADAAG) guidelines or local codes for proper ADA installation.

CRITICAL DIMENSIONS

(DO NOT SCALE)