## CERAMIC LAVATORY FAUCET SPECIFICATIONS

**IORINO**<sup>®</sup>

#### Description

- Distinctive twin lever handle transitional style mini-widespread lavatory • faucet
- Trouble-free brass frame ceramic cartridge
- Suitable for 4" to 12" on-center 3 hole installations
- Heavy duty chrome plated finish
- All brass construction •
- Includes optional deck plate for conventional 4" center-set installation
- Includes all brass pop-up with color matched trim
- 1/2" IPS connections

#### Performance

Designed to provide 2.2 GPM at 60 PSI •

#### Compliance

- Designed to comply with requirements of ASME A112.18.1 •
- Meets low lead requirements of NSF Standard- 61, Section- 9
- Meets low lead requirements of California Proposition- 65
- Complies with the requirements of the UPC (Uniform Plumbing Code)
- Complies with ADA (American With Disabilities Act)
- Meets or exceeds CSA B125

### Listings

- IAPMO (International Association of Plumbing & Mechanical Officials) •
- UPC (Uniform Plumbing Code)
- CSA (Canadian Standards Association)
- NSF Certified (National Sanitation Foundation)

## Warranty


Limited Lifetime Warranty Refer to Premier Faucet warranty program for further details and restrictions.





# Model 120072

Twin Lever Handle Mini-Widespread Lavatory Faucet Chrome Plated Finish With Brass Pop-Up 1/2" IPS Connection

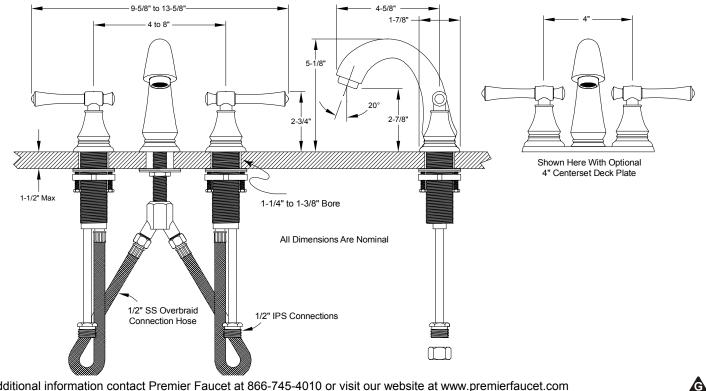

For additional information contact Premier Faucet at 866-745-4010 or visit our website at www.premierfaucet.com

Revision: 11/26/2007