

Type \_\_\_\_\_


-60

P7307

P7308

P7309

| Catalog No. | Finish | Lamping         | Dimensions (Inches) |       |
|-------------|--------|-----------------|---------------------|-------|
|             | White  |                 | A                   | B     |
| P7307       | -60    | 1-FC32          | 16                  | 4     |
| P7308       | -60    | 1-FC22 & 1-FC32 | 16                  | 4     |
| P7309       | -60    | 1-FC32 & 1-FC40 | 20                  | 4-1/2 |

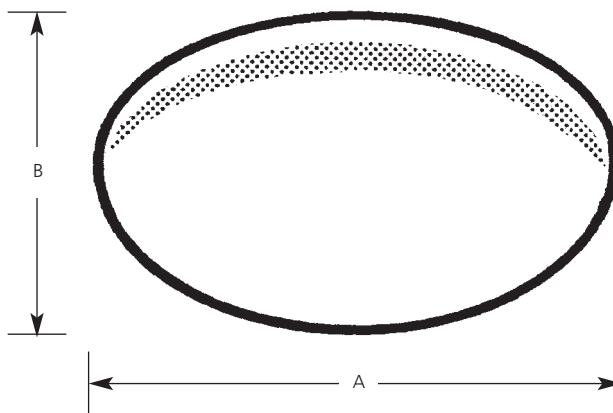

**Specifications:**

General

- White acrylic cloud diffuser  
P7307 & P7308: 16" dia. x 3-5/8" ht., 12-11/16" ID Opening  
P7309: 20 dia. x 4-1/8" ht., 17-1/16" ID Opening
- Snap-in installation
- Regressed white chassis creates floating effect
- P7308 & P7309 comply with "Americans with Disabilities Act" - ADA

Electrical

- P7307 & P7308 - 120V NPF rapid start ballast standard
- P7309 - HPF rapid start ballast standard
- Pre-wired

Labeling

- UL-CUL listed

Mounting

- Ceiling or wall mount
- White steel pan
- Covers outlet box
- Outlet box mounting strap included
- Keyhole slots for ease of mounting