




Incandescent  
Halogen

**Illuma-Flex® Mini Pendant**  
Yellow or Red Glass Shade  
Low Voltage

**Track**

	Type _____			
	-09Y	-174Y	-09PR	-174PR
P6140	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish			Lamping	Dimensions (Inches)		
	Brushed Nickel	Urban Bronze	Glass		A	B	C
P6140	-09Y	-174Y	Yellow Mottled	12v T4 35w (Incl)	3-5/8	6-1/2	72
P6140	-09PR	-174PR	Red Patterned	12v T4 35w (Incl)	3-5/8	6-1/2	72

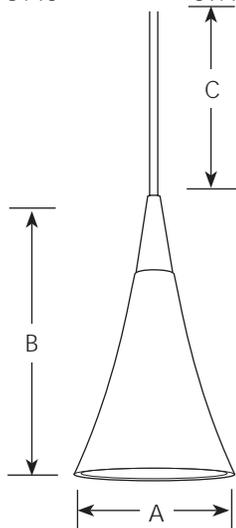

**P6140**

**Specifications:**

General

- Flex track mini-pendant
- Yellow Mottled, or Red Patterned glass shade, white interior
- Plated brushed nickel (-09) or urban bronze (-174) finishes
- One 35w T4 lamp included
- Mounts anywhere along Illuma-Flex track sections, or on monopoints
- Includes adapter that allows unit to be mounted to P8516 transformer for Alpha track system also.

- A small wiring compartment is located just below the fitter to allow adjustment of cord length
- Cord is Teflon coated copper wire with a silicon sleeve that matches the finish

Electrical

- Attachment to 12 volt Illuma-Flex track with supplied track fitter, 120V Alpha-Track using supplied P8777 adaptor and P8516 Alpha-Track transformer or monopoint canopy (requires P8780 or P8794 accessory)
- Lamp has a GY6.35 bi-pin base

Mini Pendant Support

- Attaches to Illuma-Track, P8516 transformer on Alpha track, or on P8780 monopoint with supplied fitter
- Can also be mounted on P8794 Designer monopoint by direct wiring.

Labeling

- CSA-CSA/US listed

Progress Lighting  
Post Office Box 6701  
Greenville, South Carolina  
29606

www.progresslighting.com