


Type	_____	
	-30	-31
P7375	<input type="checkbox"/>	<input type="checkbox"/>
P7376	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	White	Black		A	B
P7375	-30	-31	2-7w Twin 2-pin CFL	9	3-1/4
P7376	-30	-31	2-13w Twin 2-pin CFL	11	3-1/4

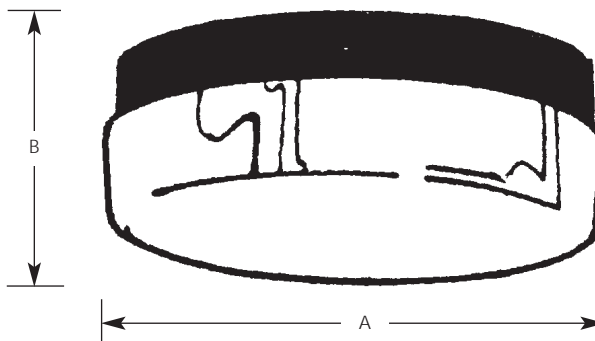

Specifications:

General

- White acrylic cloud diffuser
- Twist on installation with a single locking thumb screw
- White (-30) or Black (-31) fitter pan
°Interior white on both finishes
- Complies with "Americans with Disability Act - ADA when wall mounted"
- Steel construction

Electrical

- Pre-wired
- 120v NPF ballast
- P7376 only - HPF & 277V ballast option available
- P7375 - G23 sockets
- P7376 - GX23 sockets

Labeling

- UL-CUL damp location listed

Mounting

- Ceiling mount
- Fixture housing covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy fixture mounting



Compact Fluorescent

Round Cloud

Close to ceiling


Energy Star

Type _____

-30STRWB

P7375

Catalog No.	Finish White	Lamping	Dimensions (Inches)	
			A	B
P7375	-30STRWB	1-13w Quad CFL (included)	9	3-1/4

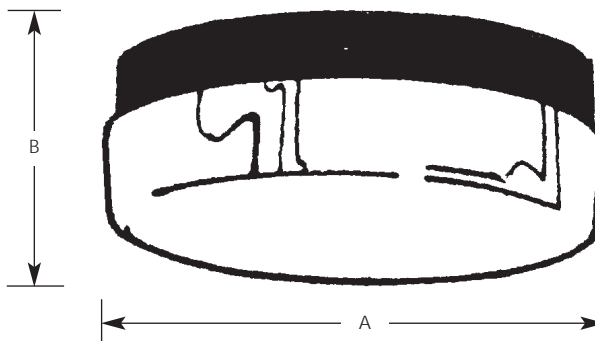

Specifications:

General

- White acrylic cloud diffuser
- Twist on installation with a single locking thumb screw
- White fitter pan
- Units comply with Energy Star requirements
- Complies with "Americans with Disability Act - ADA when wall mounted
- Steel construction

Mounting

- Ceiling mount
- Fixture housing covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy fixture mounting

Electrical

- Pre-wired
- 120v NPF electronic ballast
- G24q-1 sockets

Labeling

- UL-CUL damp location listed



Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com