


Type \_\_\_\_\_  
-51  
P7151

Catalog No.	Finish Alabaster	Application	Dimensions (Inches)			
			A	B	C	D
P7151	-51	Use with wall box or back plate	16-3/4	8-3/4	2-7/8	3-3/4

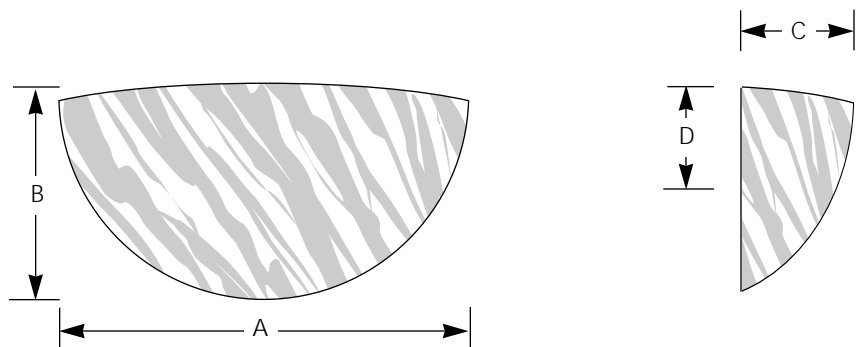

**Specifications:**

General

- Faux Alabaster wall pocket
- Quartersphere shape
- Formed 1/8" cast acrylic material
- Direct-indirect illumination
- Complies with "Americans with Disabilities Act"
- Locks in place for safety
- Interchangeable with other wall pockets diffusers

Mounting

- Wall mounted
- Horizontal mounting
- Must be used with wall box or back plate. See P3TG, P4TG or P7200-30

Electrical

- Refer to wall box or back plate


# P5 / P7151-51

Report No. 99101

No. Lamps: 1 Type Lamp: CF26 TRIPLE SYLVANIA Total Lumens: 1800

Fixture Efficiency: 64.5%

S/MH Ratio: 1.7

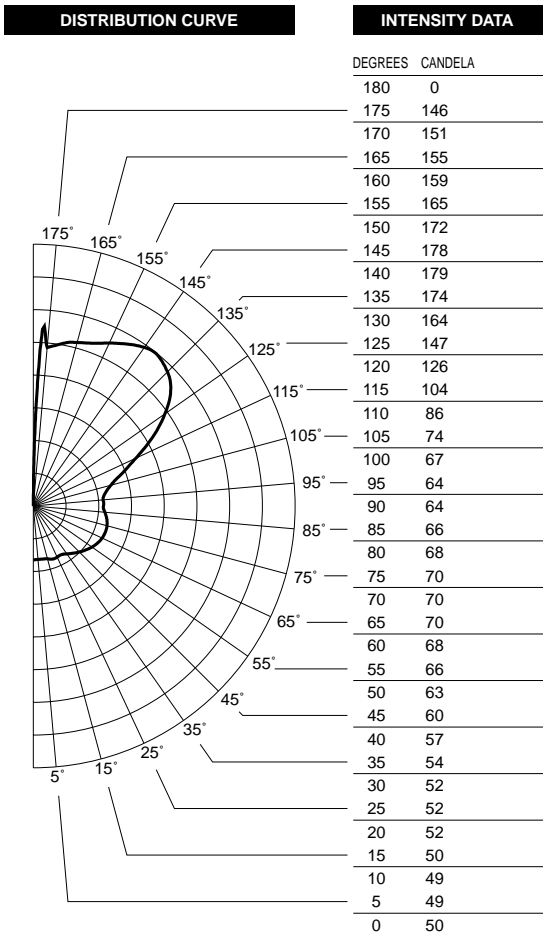

**ZONAL CAVITY COEFFICIENTS OF UTILIZATION**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30				10				0			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
0	67	67	67	67	67	60	60	60	60	48	48	48	37	37	37	27	27	27	22					
1	59	55	52	49	53	50	47	44	39	37	35	29	28	27	20	19	19	14						
2	53	47	42	38	47	42	38	35	33	30	27	25	22	21	17	15	14	10						
3	48	41	35	31	42	36	32	28	28	25	22	21	19	17	14	13	11	8						
4	43	35	30	26	38	32	27	23	25	21	18	18	16	14	12	11	9	6						
5	39	31	26	21	35	28	23	19	22	18	15	16	14	11	11	9	8	5						
6	36	28	22	18	32	25	20	17	20	16	13	15	12	10	10	8	6	4						
7	33	25	19	16	30	22	18	14	18	14	11	13	10	8	9	7	6	4						
8	31	22	17	14	27	20	16	12	16	12	10	12	9	7	8	6	5	3						
9	28	20	15	12	25	18	14	11	14	11	9	11	8	6	7	6	4	3						
10	27	19	14	11	24	17	12	10	13	10	8	10	7	6	7	5	4	2						

# P5 / P7151-51


Report No. 99125

No. Lamps: 1 Type Lamp: CF42 TRIPLE SYLVANIA Total Lumens: 3200

Fixture Efficiency: 60.9%

S/MH Ratio: 2.0

## DISTRIBUTION CURVE

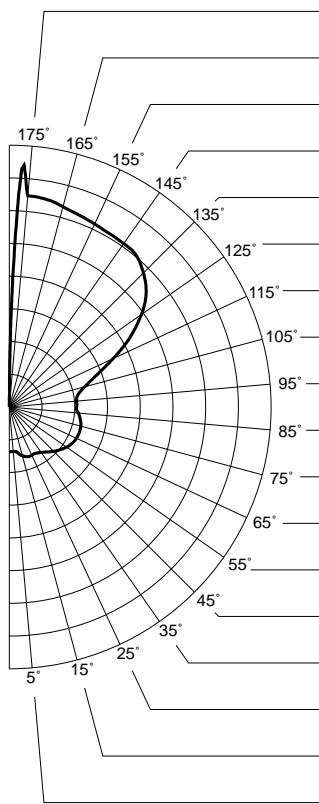

## INTENSITY DATA

DEGREES	CANDELA
180	0
175	324
170	322
165	317
160	312
155	309
150	306
145	305
140	302
135	290
130	273
125	246
120	213
115	175
110	142
105	105
100	107
95	95
90	62
85	85
80	110
75	113
70	114
65	113
60	111
55	107
50	102
45	96
40	90
35	85
30	82
25	81
20	81
15	77
10	70
5	68
0	68

## ZONAL COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30				10				0			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
0	63	63	63	63	57	57	57	57	45	45	45	34	34	34	24	24	24	20						
1	55	52	49	46	49	47	44	42	37	35	33	27	26	25	19	18	17	13						
2	50	44	40	36	44	40	36	33	31	28	26	23	21	19	15	14	13	9						
3	45	38	33	29	40	34	30	26	27	23	21	20	17	15	13	11	10	7						
4	41	34	28	24	36	30	25	22	23	20	17	17	15	13	11	10	8	6						
5	37	30	24	20	33	26	22	18	21	17	14	15	13	11	10	8	7	5						
6	34	26	21	17	30	23	19	16	18	15	12	13	11	9	9	7	6	4						
7	31	23	18	15	28	21	17	13	16	13	11	12	10	8	8	6	5	3						
8	29	21	16	13	26	19	15	12	15	12	9	11	9	7	7	6	4	3						
9	27	19	14	11	24	17	13	10	14	10	8	10	8	6	7	5	4	2						
10	25	17	13	10	22	16	12	9	12	9	7	9	7	5	6	5	3	2						