



Job Name:



Job Type:

Comments:

Quantity:

1109: 6" New Construction IC Airtight Sloped Ceiling Recessed Housing

Specification Images:

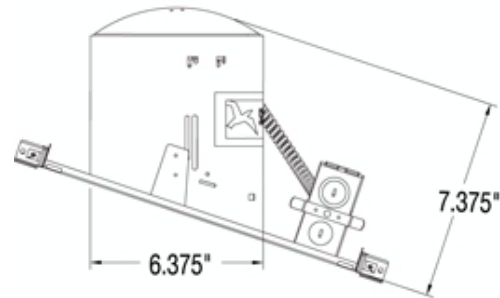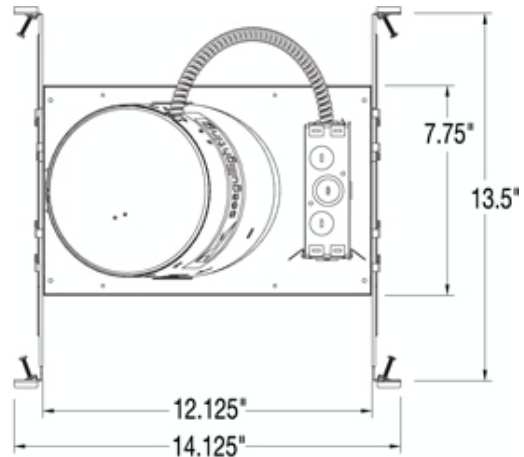

Collection: Recessed Lighting

Single IC Sloped Recessed Light Housing, Adjustable to fit varied ceilings from 11 to 45 degree slopes. All housings are thermally protected and UL listed for damp location. This item accommodates up to 75w PAR 38 or 65w BR40 reflector lamp. Easy to install features include junction box with integral Romex connector, breakaway flange, integral captive nail, and adjustable socket plate.

75w PAR38 or 65w BR40

Bar Hanger Locking Screw: Tighten screw to lock bar hangers in place.

Bar Hanger: Break-away bar hangers easily extend and will not fall out of plaster flange, providing sturdy installation.

Housing Adjustment: Housing adjusts vertically for various ceiling thicknesses.

Junction Box with Integral Romex Connector: Junction box with integral romex connector, quick-push and lock connector and through circuit wiring with 4 in, 4 out #12 wire, saves installation time.

Quick Hit: Integral captive nails included and positioned for fast, easy installation.

Adjustable Socket Plate: Adjustable socket assembly provides flexibility in lampping options and precise lamp placement with various trims.

Safe- Thermally Protected/Listed for Damp Location: IC housing is approved for use in direct contact with insulation.

UPC #:785652110900

Dimensions:

Diameter:	6 3/8"
Length:	14 1/8"
Width:	13 1/2"
Height:	7 3/8"

Features:

- Easily converts to LED with optional lampping

Material List:

1 Housing - Steel / Aluminum - Raw Steel

Safety Listing:

UL Listed for Damp Locations / IC
cUL Listed for Damp Locations / IC

Instruction Sheets:

English (HC-430)

Shipping Information:

Package Type	Product #	Quantity	UPC	Length	Width	Height	Cube	Weight	UPS Ship
Individual	1109	1	785652110900	15	15	8	1.042	2.7	Yes
Master Pack		6	10785652110907	30	26	9	4.063	19.8	Yes
NJ Pallet		96		48	40	73	81.111	316.8	No
NV Pallet		96		48	40	73	81.111	316.8	No

Trim

1121-14
6" Sloped Trim
White Trim / Baffle Aluminum Baffle
White Trim / Baffle Plastic Trim
Maximum Wattage:
13.5w A19
15w PAR30L
18w PAR38
15w BR30
75w PAR38

1121-15
Single-Light Recessed Inc
Black Aluminum Baffle
White Plastic Trim
Maximum Wattage:
13.5w A19
15w PAR30L
18w PAR38
15w BR30
75w PAR38

1122-14
Single-Light Incandescent
White Trim / Baffle Plastic Baffle
White Trim / Baffle Plastic Trim
Maximum Wattage:
13.5w A19
15w PAR30L
18w PAR38
15w BR30
75w PAR38

1122-19
Single-Light Incandescent
Metallic Gold Plastic Baffle
White Plastic Trim
Maximum Wattage:
13.5w A19
15w PAR30L
18w PAR38
15w BR30
75w PAR38

1122-22
Single-Light Incandescent
Polished Aluminum Plastic Baffle
White Plastic Trim
Maximum Wattage:
13.5w A19
15w PAR30L
18w PAR38
15w BR30
75w PAR38