SPEAKMAN®

SC-7122



Healthcare Fittings



GENERAL SPECIFICATION

Polished chrome plated Commander two handle laboratory faucet with 1/4 turn ceramic cartridges covered by a 25-year warranty. Accommodates installations up to 2-1/4" thick. 5-1/4" deep gooseneck spout, rigid or swivel. Vandal-resistant flow control reduces flow to 1.5 gpm/5.7 L/min. Meets ASME A112.18.1/CSA B125.1, NSF61 and WaterSense.

🗆 SC-7122 占

Laboratory faucet with vandal-resistant lever handles.

OPTIONS

SUFFIX	DESCRIPTION
□ FC*	2.0 gpm laminar flow control, plain end spout
□ 4*	3-3/4" deep spread gooseneck spout, rigid or swivel
□ 8*	8" deep spread gooseneck spout, rigid or swivel

HANDLES

SUFFIX DE	SCRIPTION
□ RPG04-0316-	C 4" wrist blade handles

*See page 257 for optional spout specifications

 ** The following options are not available with the "CA" option:

SO, TWI, VB6, VB8, ST, SW, & TMV.

This space for Architect/Engineer approval.




Management Systems Registered to ISO 9001

SPEAKMAN[®]

Rough-Ins



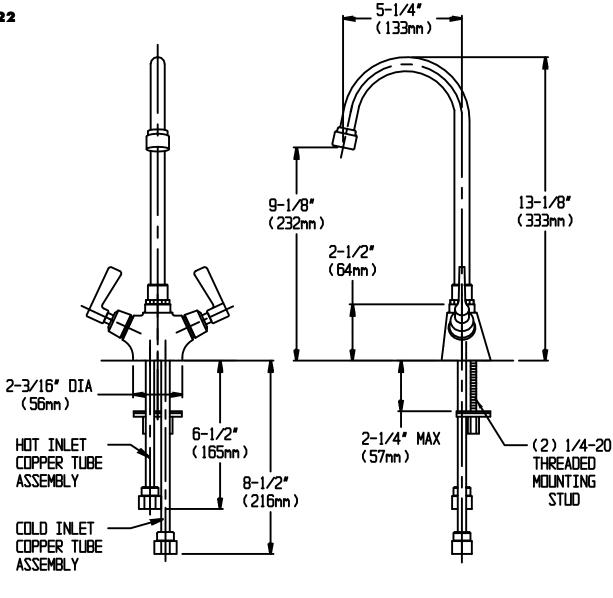

NOTE: Unless otherwise specified, all inlets are 1/2" NPSM. Inlets are sized for coupling connections. All dimensions are in inches unless otherwise specified and are subject to change without notice.

SPEAKMAN[®]

