SPEAKMAN®

SEF-9200

EYEWASH/DRENCH HOSE ATTACHMENT SPECIFICATIONS

DESCRIPTION

The SE-9200 Eyewash system provides an ANSI compliant eyewash solution with no additional plumbing required. This unit connects directly to the cold water integral stop port of any installed Speakman SC-5811 service sink faucet

A special adapter fitting replaces the integral cold water stop permitting both units to operate independently of each other or simultaneously and there is never a worry about delivering scalding water to the eyes.

SPECIFICATIONS

EYEWASH

Supply: Speakman SC-5811-RCP service sink faucet's cold water integral stop port

Activator: Squeeze valve with automatic stay open device

Spray Heads: (2) yellow ABS plastic spray

outlets with flip-top dust caps Performance: 2.4 gpm @ 30 psi

Backflow Prevention: Integral vacuum

breaker and check valve Compliance: ANSI Z358.1

SERVICE SINK FAUCET (Sold Separately)

Supply: 1/2" NPT female inlets

Activator: Vandal resistant four arm handles with color

coded indexes

Cartridges: Perfect® valves with ½ turn ceramic

cartridges covered by a 25-year warranty

Outlet: Cast brass nozzle with 3/4" hose thread,

pail hook and top brace

Performance: 4 gpm (min) @ 20 psi

Backflow Prevention: Integral vacuum breaker

Compliance: ASME A112.18.1-2000

& CSA B125-98

Universal Emergency Sign Included

OPTIONS


TW Addition of SE-370 thermostatic

mixing valve

FM Eyewash permanently fastened to wall,

eliminating back flow prevention

requirement

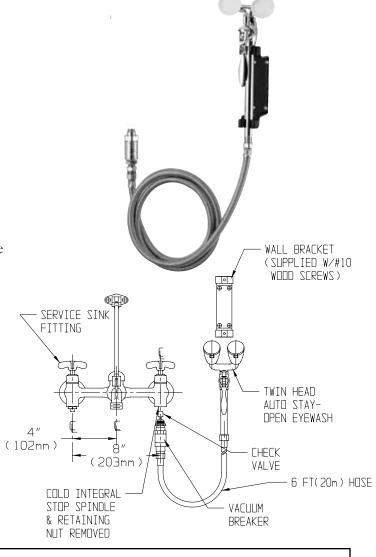

Job Name	
Location	
Architect/Engineer	
Sales Representative	
Wholesaler	
Date Model #	