

# Depend on it !

## DHC Series Tankless Electric Water Heaters

- Designed for all point-of-use water heating applications
- Best warranty in the industry
- Exclusive scald-guard thermostat
- Instant hot water anytime
- Compact size fits anywhere
- No pressure relief valve, drains, or circulating pumps needed
- Most dependable unit in the industry

*Leaders in Tankless Electric  
Water Heating Technology*

**Exclusive copper-clad  
heating element**

## **STIEBEL ELTRON**

*It works better. Pure and simple.*

**Call Today !**

**1-800-582-8423**

  
C<sub>ETL</sub> US  
For U.S. and Canada


**ISO 9001**  
CERTIFIED

# DHC Series Tankless Electric Water Heaters

# STIEBEL ELTRON

## Ideal for all point-of-use water heating applications !

STIEBEL ELTRON DHC tankless electric water heaters are the ideal choice for all point-of-use applications in the following settings:

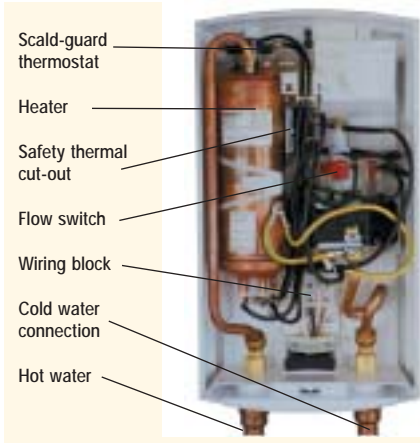

**Engineer's Specifications:** The tankless electric water heater shall be equipped with a copper sheathed heating element housed in a copper cylinder. The flow switch that operates the heating element shall be of the mechanical pressure differential type. The unit shall be equipped with a safety high-limit switch with manual reset. In addition, the unit shall be equipped with a separate self-resetting thermostat designed to keep the water temperature at the tap below 130°F. An integral tamper-proof flow adjustment screw shall be provided for the installer so that water flow rates can easily be adjusted. The water connections shall be designed for 1/2" NPT female adapter. The housing shall be made of high impact polycarbonate plastic.

### Commercial • Industrial • Institutional

- Office Buildings
- Stores
- Malls
- Warehouses
- Restaurants
- Gas Stations
- Schools
- Hotels/Motels
- Commercial Condominiums
- Manufacturing Facilities

### Residential

- Bathroom Sinks
- Kitchen Sinks
- Laundry Areas
- Cabins/Cottages
- Low Flow Showers

The STIEBEL ELTRON DHC tankless water heaters are designed for installation at the point-of-use. They heat water instantaneously as it flows through the unit. Stand-by heat-loss is completely eliminated. The heating elements are controlled by a flow switch and by an exclusive scald-guard thermostat, which keeps the water temperature within safe limits at all times. In addition, the DHC water heaters are equipped with a safety high-limit with manual reset. The rugged all copper design ensures many years of reliable service.

The models DHC 3-1, DHC 3-2 and DHC 4-2 are shipped with 0.5 GPM pressure compensating flow reducer/aerators that fit on most faucets. Flow controls and faucet aerators are highly recommended in conjunction with tankless water heaters.

### DHC Technical Data

Model		DHC 3-1		DHC 3-2		DHC 4-2		DHC 4-3		DHC 5-2		DHC 6-2		DHC 8-2		DHC 10-2	
Phase		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Voltage	V	120	208	240	208	240	277	208	240	208	240	208	240	208	240	208	240
Wattage	KW	3.0	2.5	3.3	2.9	3.8	4.5	3.6	4.8	4.5	6.0	5.4	7.2	7.2	9.6	7.2	9.6
Amperage	A	25	12	14	14	16	17	18	20	22	25	26	30	35	40	35	40
Min. required circuit breaker size	A	30	15	20	20	20	20	30	30	30	30	30	40	40	50	40	50
Recommended wire size	AWG COPPER	10	14	12	12	12	12	10	10	10	10	10	8	8	8	8	8
Min water flow to activate unit	GPM / L/min	0.32 / 1.2	0.32 / 1.2	0.42 / 1.6	0.42 / 1.6	0.42 / 1.6	0.42 / 1.6	0.42 / 1.6	0.42 / 1.6	0.47 / 1.8	0.69 / 2.6	0.69 / 2.6	0.79 / 3.0	0.79 / 3.0	0.79 / 3.0	0.79 / 3.0	0.79 / 3.0
Weight	lbs. / KG	4.6 / 2.1	5.3 / 2.4	5.3 / 2.4	5.3 / 2.4	5.3 / 2.4	4.6 / 2.1	4.6 / 2.1	4.6 / 2.1	4.6 / 2.1	5.3 / 2.4	5.3 / 2.4	5.3 / 2.4	5.3 / 2.4	5.3 / 2.4	5.3 / 2.4	5.3 / 2.4
Dimensions (Height/Width/Depth)	in. / cm	14 3/16(36.0) / 7 7/8(20.0) / 4 1/8(10.4)															
Nominal water volume	Gal / L	0.13 / 0.51															
Working pressure	PSI / bar	150 / 10															
Tested to pressure	PSI / bar	300 / 20															
Water connections		1/2" NPT															

\* Suitable for supply with cold water

\* Tankless water heaters are considered a non-continuous load

\* Conductors should be sized to maintain a voltage drop of less than 3% under load

Type	Temperature Increase Above Ambient Water Temperature [F°]									
	kW	GPM								
	0.32	0.42	0.5	0.69	0.75	0.79	1.0	1.5	2.0	
DHC 3-1 @ 120V	3.0	65	48	41	30	27	26	20	14	10
DHC 3-2 @ 208V	2.5	54	40	34	25	23	22	17	11	9
DHC 3-2 @ 240V	3.3	71	53	45	33	30	28	22	15	11
DHC 4-2 @ 208V	2.9	-	47	40	29	26	25	20	13	10
DHC 4-2 @ 240V	3.8	-	61	52	38	35	33	26	17	13
DHC 4-3 @ 277V	4.5	-	73	61	45	41	39	31	20	15
DHC 5-2 @ 208V	3.6	-	58	49	36	33	31	25	16	12
DHC 5-2 @ 240V	4.8	-	77	65	48	44	41	33	22	16
DHC 6-2 @ 208V	4.5	-	-	61	45	41	39	31	20	15
DHC 6-2 @ 240V	6.0	-	-	82	60	54	52	41	28	20
DHC 8-2 @ 208V	5.4	-	-	-	54	41	39	31	20	15
DHC 8-2 @ 240V	7.2	-	-	-	71	65	62	49	33	25
DHC 10-2 @ 208V	7.2	-	-	-	-	-	62	49	33	25
DHC 10-2 @ 240V	9.6	-	-	-	-	-	82	65	44	33

Limited Warranty (Excerpt): STIEBEL ELTRON, Inc. warrants to the original owner that the DHC Series Water Heater will be free from defects in workmanship and materials for a period of THREE YEARS from the date of purchase. Should any part(s) prove to be defective during this period, STIEBEL ELTRON, Inc. will be responsible for replacement of the defective part(s) only. STIEBEL ELTRON, Inc. is not responsible for labor charges.

### STIEBEL ELTRON, Inc.

242 Suffolk Street, Holyoke, MA 01040

Phone: (413) 538-7850 • (800) 582-8423

Fax: (413) 538-8555

E-mail: [info@stiebel-eltron-usa.com](mailto:info@stiebel-eltron-usa.com)

Please visit our web site at [www.stiebel-eltron-usa.com](http://www.stiebel-eltron-usa.com)

Distributed by: