

# TOTO®

Perfection by Design

## CST764SG/CST764S

### Vespin, 1.6 GPF Toilet, Elongated




CST764SG - Vespin Toilet with SS114 - SoftClose Seat




G-Max Technology: Quiet, powerful, commercial grade flushing performance.



UniFit Rough-in: Easy to install, 10", 12" and 14" rough-in's available.

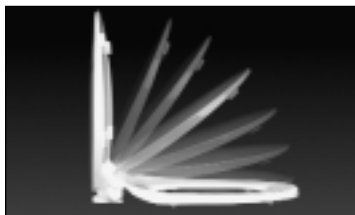

Choose a SoftClose toilet seat or upgrade to a Zoë Washlet or Warmlet.

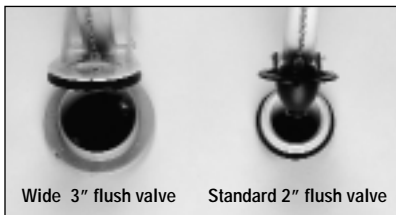

Fast Flush: New, wider 3" flush valve is 125% larger than conventional 2" flush valves.

Colors:  
 Standard #01 Cotton  
 Optional See price book for additional colors

Trip Lever:  
 Standard Color Matched  
 Optional See price book for additional finishes

- Contemporary design, close coupled toilet.
- Skirted styling with concealed trapway for easy cleaning.
- Unifit Rough-in
- Sanagloss Technology: super smooth, ion barrier glazing for a clean toilet bowl
- G-Max Technology
- Powerful, quiet flush every time
- Large water surface

High profile close coupled toilet with 12" UniFit rough-in. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, color matched trip lever, vitreous china mounting covers, less seat.

#### ■ CST764SG

Elongated, less seat. 12" UniFit rough-in. SanaGloss Glazing. Available Colors: #01, #11, #12, #03.

#### ■ CST764S

Elongated toilet, less seat. 12" UniFit rough-in. Less SanaGloss Glazing. Available colors: #04, #51.

#### □ CT764SG

Elongated front bowl only, 12" UniFit rough-in. SanaGloss Glazing. Available Colors: #01, #11, #12, #03.

#### □ CT764S

Elongated front bowl only, 12" UniFit rough-in. Less SanaGloss Glazing. Available colors: #04, #51.

#### □ ST707S

Tank and cover only. Complete with tank trim & coupling components.

#### □ TSU01W.10

10" UniFit rough-in: Optional.

#### □ TSU01W.12

12" UniFit rough-in: Supplied.

#### □ TSU01W.14

14" UniFit rough-in: Optional.

# CST764SG/CST764S

## Vespin, 1.6 GPF Toilet, Elongated

### ■ PERFORMANCE

The TOTO G-Max low consumption toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

### ■ SPECIFICATIONS

Water Use: 6Lpf/1.6 Gpf  
 Flush System: Gravity Feed  
 (G-Max System)

Min. Water Pressure:

8 psi

Water Surface: 10-1/4" x 8-1/4"

Trap Diameter.: 2-1/16"

Rough-in: 12" (10" and 14" optional)

Trap Seal: 2-1/2"

Warranty: Five Year Limited Warranty

Material: Tank & Bowl: Vitreous China

UniFit Rough-in: PVC

Shipping Weight: **CT764SG/CT764S** - Bowl 75 lbs.  
**ST707S** - Tank 34 lbs.

Shipping Dimensions:

**CT764SG/CT764S** - Bowl

30-1/8"L x 16-3/4"W x 22"H

**ST707S** - Tank


20-1/8"L x 8-1/4"W x 15-1/2"H

*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.*

*Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others.*

*These dimensions and specifications are subject to change without notice.*

U.S. Patent: 5,819,326  
 5,983,413 and pending  
 6,108,826

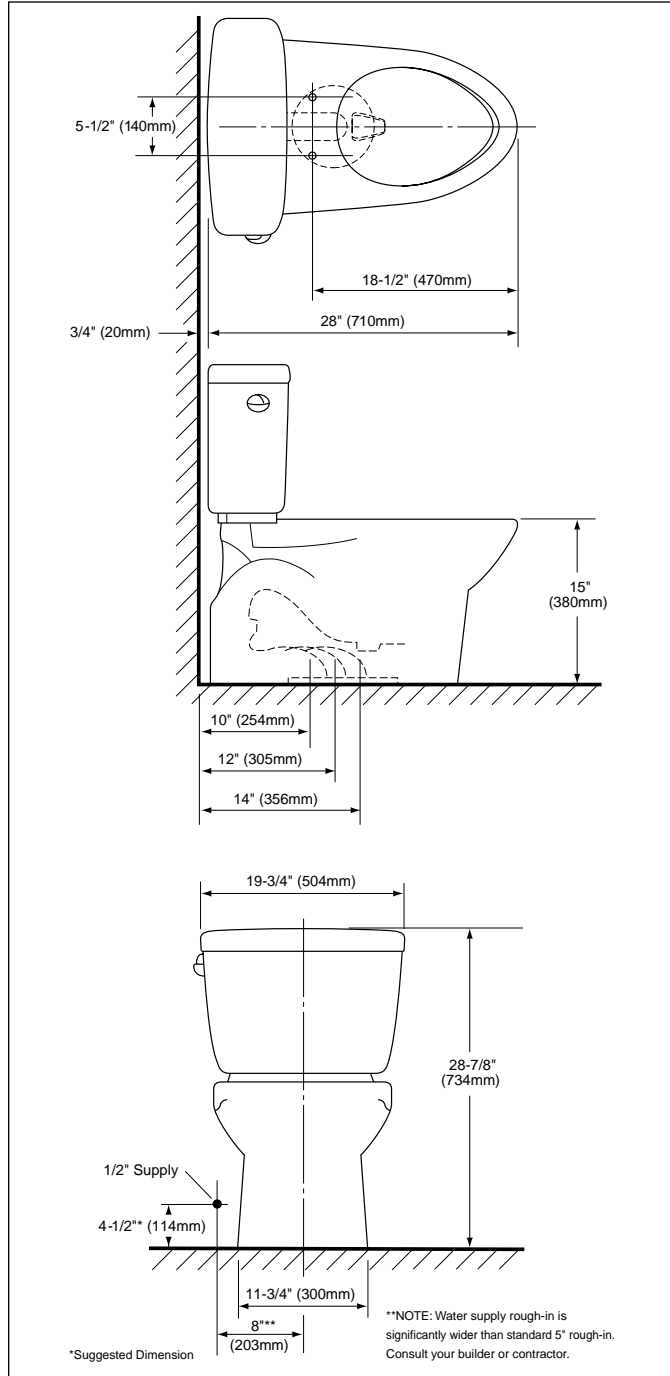

CST764SG/CST764S - Vespin Toilet