

# TOTO®

# MS964214CEF(G)

Eco Soirée® One Piece Toilet, Universal Height, 1.28 GPF



- Sophisticated contemporary design
- Double Cyclone® flushing system
- SanaGloss® ceramic glaze available
- Universal Height
- Decorative one-piece with skirted design and high-profile tank
- Elongated front bowl with SoftClose® seat
- Chrome trip lever
- 12" UniFit rough-in, less supply

ADA Compliant one piece toilet. Low consumption (1.28Gpf/4.8Lpf) Double Cyclone flushing action.

#### □ MS964214CEF(G)

With Sanagloss ceramic glaze  
(Available in: #01,#11,#03,#12)

#### □ MS964214CEF

(Available in: #51)

#### □ SS214

Soirée SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

#### □ TSU03W.10

10" UniFit rough-in: Optional.

#### □ TSU03W.12

12" UniFit rough-in: Supplied.

#### □ TSU03W.14

14" UniFit rough-in: Optional.

#### Colors:

Standard #01 Cotton, #11 Colonial White  
#12 Sedona Beige, #03 Bone  
#51 Ebony

#### Trip Lever:

Standard #CP Chrome Plated

Optional See price book for additional information.

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

 ADA Compliant

For installation condition with approach from the left hand side.

MS964214CEF(G) - Eco Soirée® Universal Height Toilet with SoftClose® Seat



Double Cyclone® flushing system with maximum cleaning action for a cleaner, more hygienic toilet bowl.



UniFit Rough-in: Easy to install 10", 12" and 14" rough-in's available.



SanaGloss® glaze seals the surface, creating a finish that actually repels stains caused by buildup of mineral deposits.



Complete with SoftClose® seat, or upgrade to a Washlet®.



Double Cyclone Technology: A quiet, powerful commercial grade flushing performance.



# MS964214CEF(G)

## Eco Soirée® One Piece Toilet, Universal Height, 1.28 GPF

### ■ PERFORMANCE

The TOTO® Soirée® Toilet features the Double Cyclone® flushing system. Using two powerful nozzles, the Double Cyclone® flushing system creates a forceful centrifugal action that cleans the rim and bowl thoroughly with every flush. The rim has no holes, which makes it easier to clean and offers a seamless appearance.

### ■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf  
 Flush System: Double Cyclone®  
 Min. Water Pressure: 8 psi (Static)  
 Water Surface: 7-7/8" x 9-13/16"  
 Trap Dia.: 2-1/8"  
 Rough-in: 12" (Standard) 10", 14"  
 Trap Seal: 2-3/16"  
 Warranty: One Year Limited Warranty  
 Material: Vitreous China

Shipping Weight: **MS964214CEFG**  
 105 lbs.

Shipping Dimensions:  
**MS964214CEFG**  
 32"L x 19-1/2"W  
 x 29"H


*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2, CSA B45 requirements, and LASPS for rebate program.*

*Listing / Approvals: c-UPC, City of Los Angeles, State of Massachusetts, and others.*



*Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side.*

*These dimensions and specifications are subject to change without notice.*

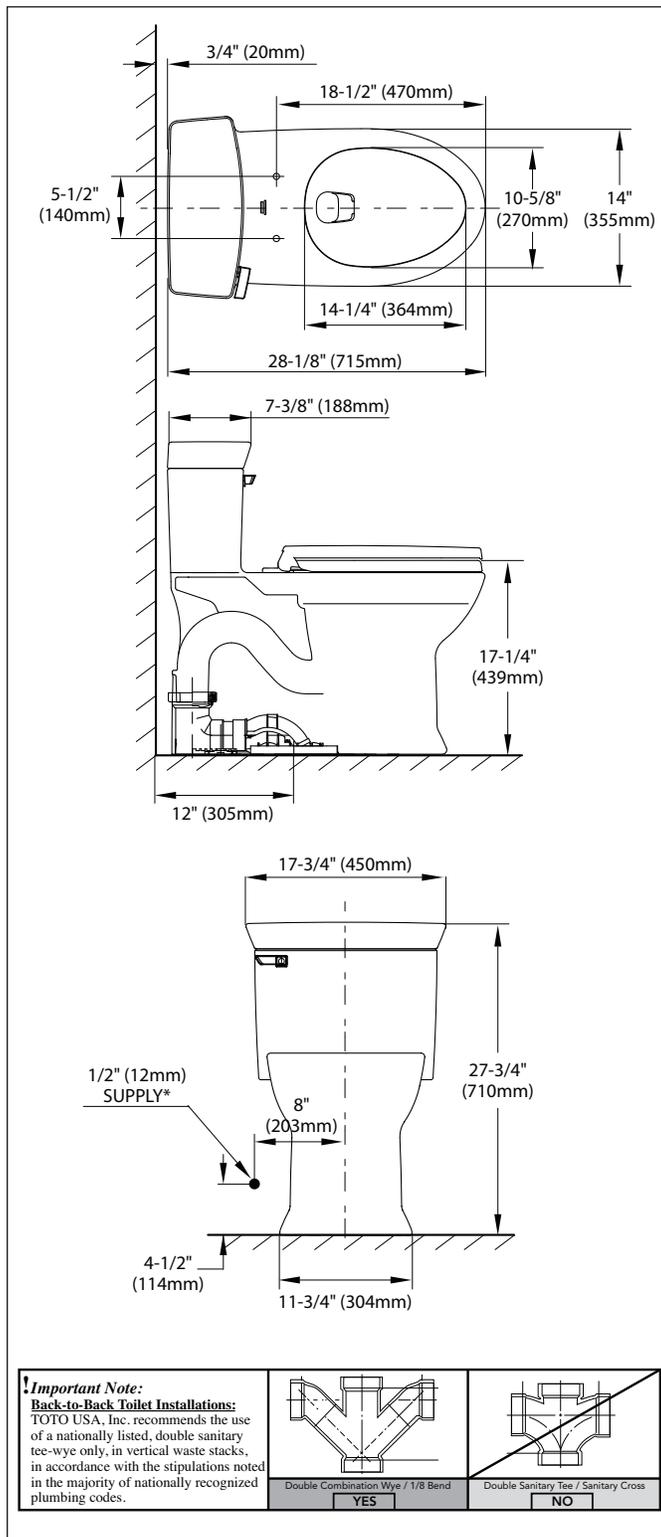

**MS964214CEF(G) - Eco Soirée® Universal Height, One-Piece Toilet**



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com  
 Printed in U.S.A. © TOTO LTD. 12/08 #A10670

Printed on recycled paper

REV 02/09