

To be specified:

Sensor Operated Automatic Soap Dispenser

- Dispenser and tank with 5M cable, Nickel Chrome Plated Finish

- One Spout - TES1ADC-05
- Two Spouts - TES2ADC-05
- Three Spouts - TES3ADC-05

- Dispenser and tank with 12M cable, Nickel Chrome Plated Finish (Special Order)

- Three Spouts - TES3ADC-12
- Four Spouts - TES4ADC-12
- Five Spouts - TES5ADC-12
- Six Spouts - TES6ADC-12

Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements for people with disabilities. UL Approved.



TES1ADC-05

AUTOMATIC DISPENSING SYSTEM

TOTO®, the world leader in advanced plumbing systems, provides sensor operated Automatic Soap Dispensers for facilities demanding the finest sanitation equipment for busy restrooms. “Hands-free” technology effectively reduces unsanitary conditions. Economical pre-measured foaming soap saves soap and money.

SUPERIOR

The TOTO Soap Dispenser senses the user’s presence and dispenses a measured application of foamed hand soap from a one gallon reservoir or optional 5 gallon reservoir. The optional reservoir reduces the labor to refill soap with over 24,000 hand washes per refill.


ATTRACTIVE

TOTO’s Soap dispenser provides a clean and attractive look for the restroom. TOTO Soap Dispenser eliminates the unsightly mess of countertop soap reservoirs by placing the soap reservoir out of sight under the counter or even in another room (with optional 12m tube/cord). The optional 12m (39.4’) tube/cord assembly can allow two restrooms to share a single soap reservoir and pump system.

“SMART SENSOR”

A self-adjusting sensor facilitates installation by preventing the need to make additional manual adjustments to the detection range, depending on the size of the basin the dispenser is installed upon. The dispenser will operate only three times in succession if a constant presence is detected.

OPERATING PROCEDURE A sanitary environment without using the hands.

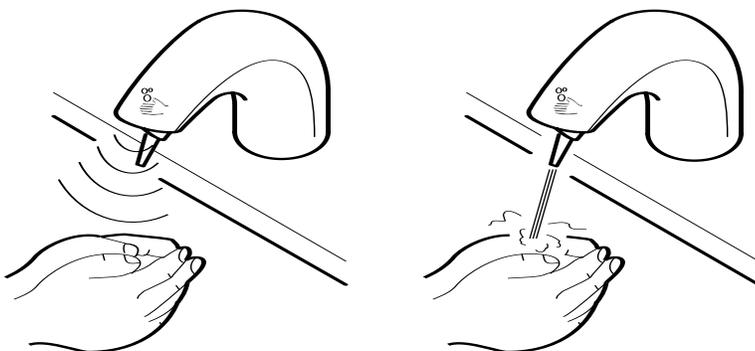

Sensor Operated Soap Dispenser by TOTO®

SPECIFICATIONS


Product	TES1ADC-05 One Spout 5M cable TES2ADC-05 Two Spouts 5M cable TES3ADC-05 Three Spouts 5M cable TES3ADC-12 Three Spouts 12M cable (Special Order) TES4ADC-12 Four Spouts 12M cable (Special Order) TES5ADC-12 Five Spouts 12M cable (Special Order) TES6ADC-12 Six Spouts 12M cable (Special Order)
Power Supply	Input: AC 120V 60 Hz Output: 24V
Length of Power Supply Cord	51" (1.3m)
Tank Capacity	1 Gallon (Optional 5 Gallon tank available for total capacity of 6.8 gallons for 3 spout model or 8 gallons with 4+ spout models)
Soap Dispensing Quantity	Factory setting at 1ml (foam)
Length of Cord for Tank to Spout	16.4' (5m), optional 39.4' (12m)
Dispensing Timer Adjustability	Timing controlled from 0.2-20 seconds
Detection time	Factory setting at six (6) seconds minimum
Detection range	4" (110mm)
Warranty	Limited three (3) year warranty on all component parts. Details available upon request.
Listings	

U.S. Patent Pending

SUGGESTED ENGINEERING SPECIFICATION:

TOTO® Model No. _____ Automatic infrared sensor activated, soap dispenser minimum 4L soap reservoir . Vandal resistant hex head screws. Automatic sensor adjustment on installation.

DIAGRAM:

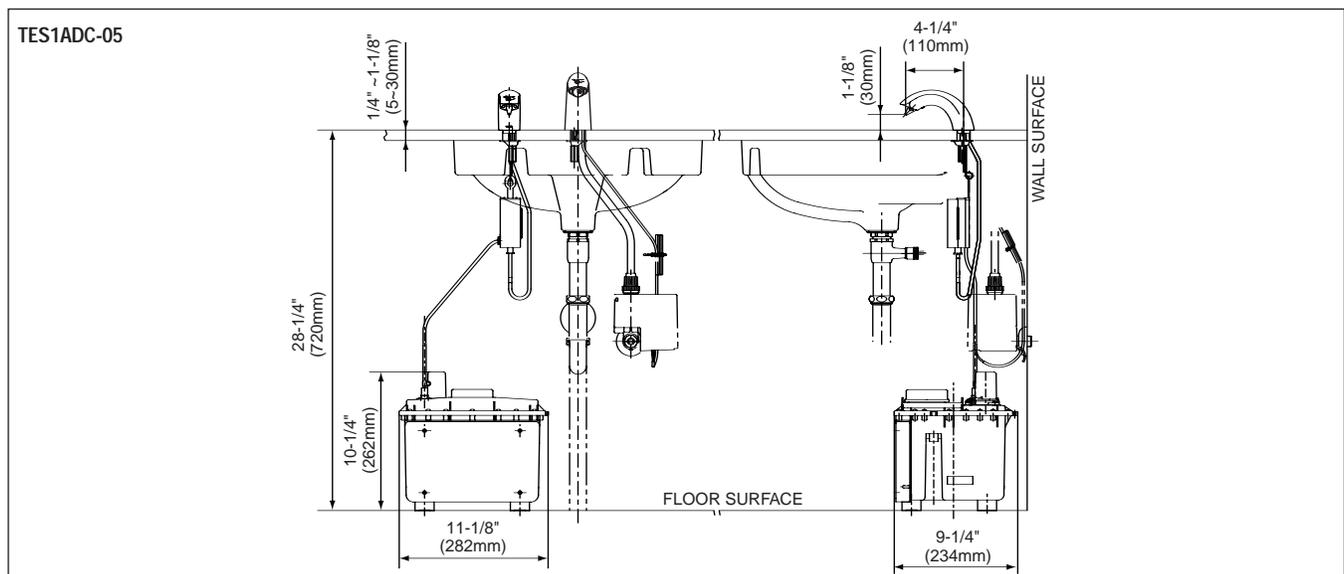

TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com

Printed in U.S.A. © TOTO® LTD. 04/07 #J90090

Printed on recycled paper 

REV 04/07