

Specifications

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

FAUCET DESCRIPTION

- Reflex[™] pulldown system offers smooth operation, easy movement and secure docking
- High arc spout provides the height and reach to fill or clean large pots while the pulldown feature provides the infinite maneuverability for cleaning or rinsing
- Metal construction with various finishes identified by suffix
- Hydrolock[®] quick connect system
- Pulldown spray with 68" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Two handle lever
- When filling a vessel outside of the sink, the pause feature conveniently stops the flow of water as the wand passes over the countertop
- Convenient single-button actuation provides flexibility to switch from stream to spray mode

FLOW

• Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- 1224 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein
- Meets CalGreen and Georgia SB370 requirements
- Certified to ANSI/NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow.
- ADA 🛃 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




Aberdeen™ Two Handle High Arc Pull Down Kitchen Faucet

Models: 7592 series

NOTE: DESIGNED TO INSTALL THRU 3 HOLES 1-1/4" (32mm) MIN. DIA.



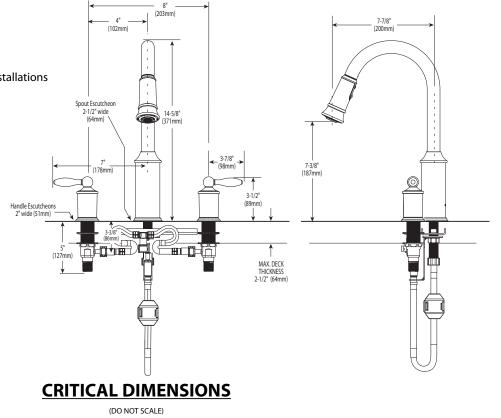

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

J MOEN Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- High arc spout provides the height and reach to fill or clean large pots while the pulldown feature provides the infinite maneuverability for cleaning or rinsing
- Metal construction with various finishes identified by suffix
- Hydrolock® quick connect system
- Pulldown spray with 68" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Two handle lever
- When filling a vessel outside of the sink, the pause feature conveniently stops the flow of water as the wand passes over the countertop
- Convenient single-button actuation provides flexibility to switch from stream to spray mode

FLOW

Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE

- 1224 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

WARRANTY


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein
- Certified to ANSI/NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow.



Aberdeen™ **Two Handle High Arc Pull Down Kitchen Faucet**

Models: 7592 series

NOTE: DESIGNED TO INSTALL THRU 3 HOLES 1-1/4" (32mm) MIN. DIA.

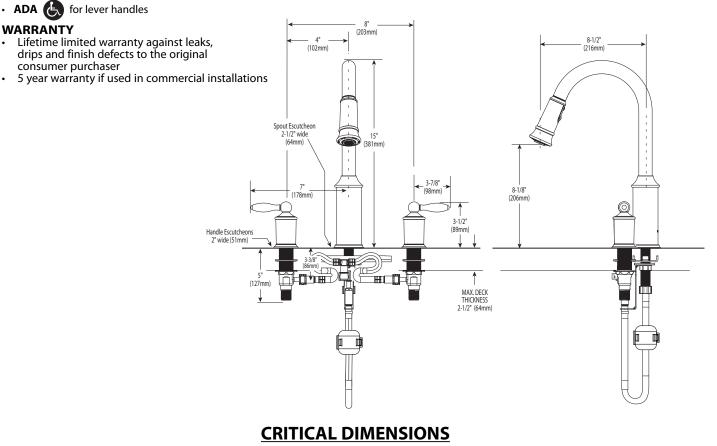

(DO NOT SCALE)

FOR MORE INFORMATION: 1-800-BUY-MOEN www.moen.com