



Copper Creek Hardware E-Series ANSI/BHMA Grade-3 Standard Duty Residential Knob Specifications



BK 2000 Series
Ball Style



CK2000 Series
Colonial Style




EK2000 Series
Egg Style



Available
UL LISTED

	A	B	C
Ball	1-15/16"	2-3/8"	2-9/16"
Colonial	2-3/16"	2-3/8"	2-9/16"
Egg	2-7/16"	2-3/8"	2-9/16"

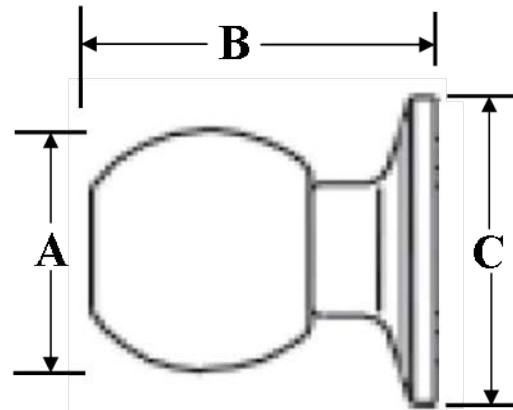

Knob Specifications & Options	
ANSI / BHMA	ANSI 156.2 Grade-3.
Rose Diameter	2-9/16"
Cylinder	5 pin "KW1" std. 5 Pin "C" optional.
Keying	As Specified: Available Master keyed, builder keyed, KD, KA.
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable latch optional.
Strike	PT-LS06: 2-3/4" full lip round corner Strike std.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" backset standard, 2-3/4" optional.
Door Thickness	Min.. 1-3/8", Max 1-3/4".
Handing	All EP Series Knobs are non-handed.
U.L. Labeled	Available 90-minute U.L. Labeled.
Warranty	Lifetime mechanical, 10 year finish.

STYLE	In Stock Finish								Case Qty
	SS	TB	AB	AN	BC	PB	PS	PW	Units
Ball	x	x	x	x		x	x	x	24
Colonial	x	x		x	x	x	x		24
Egg	x	x		x	x		x		24

Function	Operation
2020 Passage	Both knobs always free turning. No locking operation.
2030 Privacy	Inside turn-button locks and unlocks both knobs. Knob can be unlocked by rotating the outside privacy mechanism.
2040 Entry	Outside key or inside turn-button locks both knobs.
2090 Dummy	1/2 Dummy - Used as pull or decorative trim only