
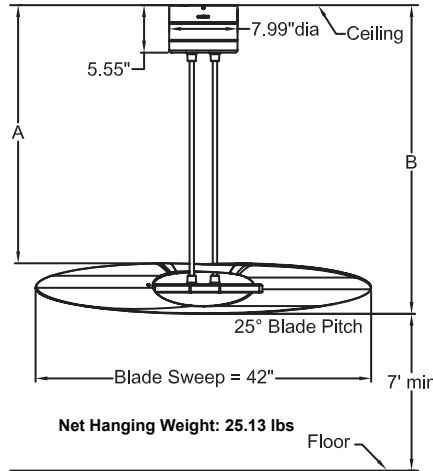


MAREA™

FP8026** Ceiling Fan

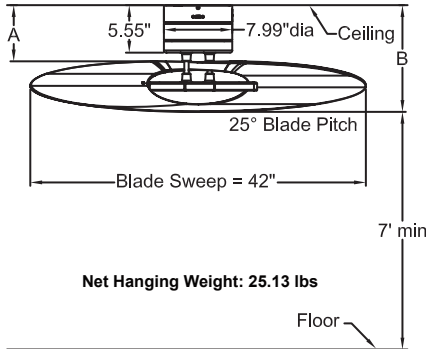

	A	B
Fan w/12" downrod	6.56"	12.00"
Fan w/36" downrod	30.19"	36.00"

Available Finishes		
Fan / Housing Assembly		Blades
OB	Oil-rubbed Bronze	Amber Frosted
SN	Satin Nickel	White Frosted

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 25 motor is designed for optimal performance with this fan.

FAN SPEEDS:

High—111 rpm; Med—82 rpm; Low—50 rpm;

BLADES:

Acrylic Blade included.

CONTROL OPTIONS:

TR33 hand-held remote control is included. Push button remote control has 3 fan speeds and off button. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with 2 sets of double (12" and 36") downrods included. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	111	3151	69	0.41	45.7
Med	82	1914	75	0.35	25.6
Low	50	1135	95	0.26	11.9