


The Quattro™

FP8050SN Fan





SPECIFICATION SHEET

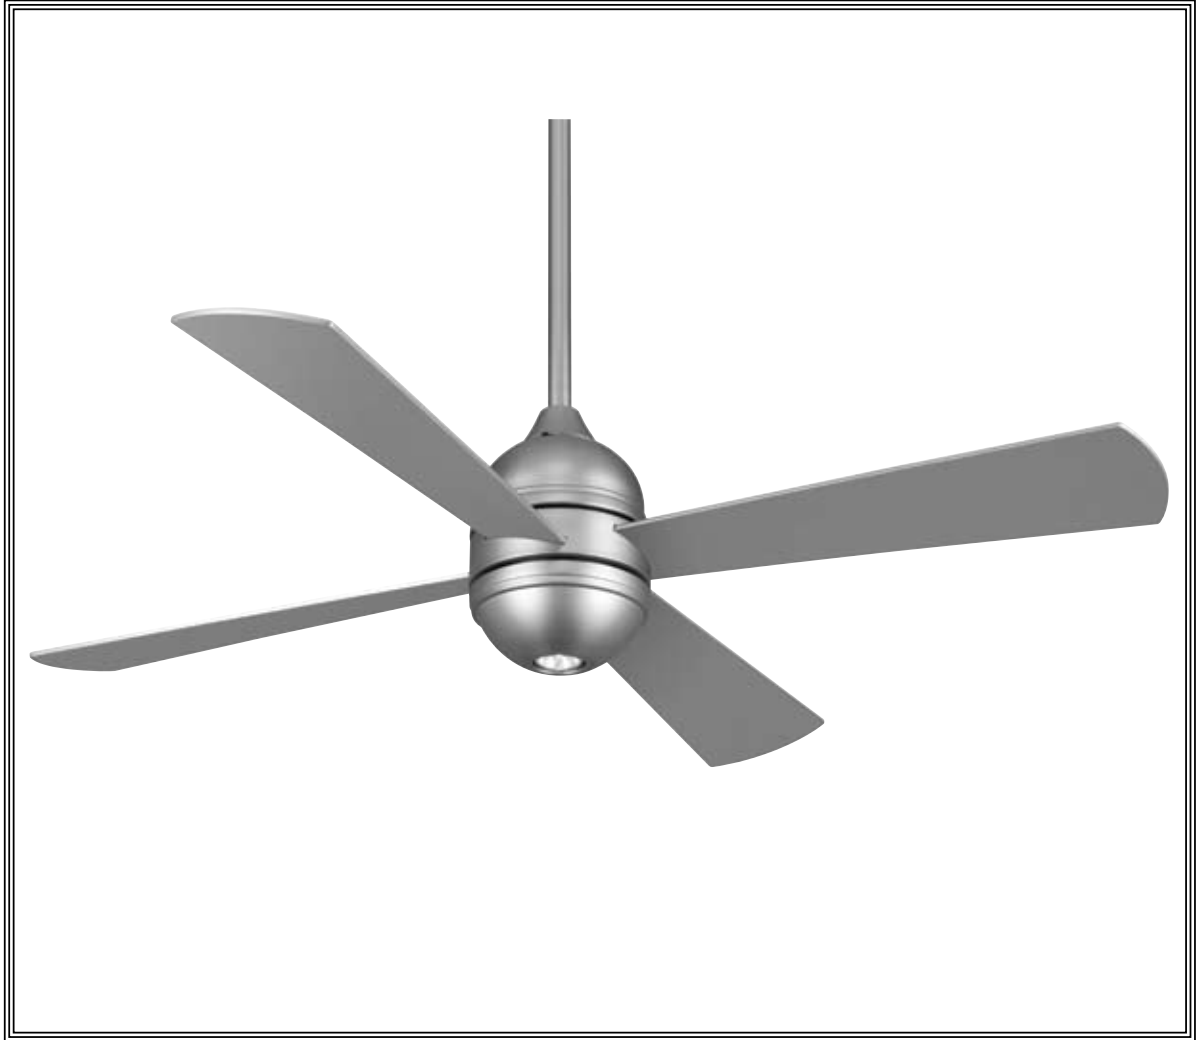

Product Specifications Subject To Change

QUATTRO™

FP8050SN Ceiling Fan

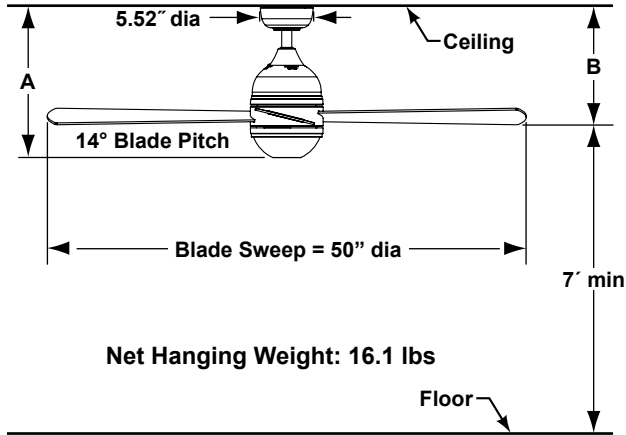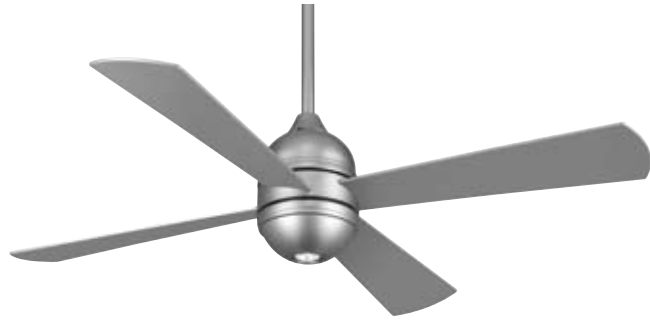

	A	B
Fan w/4.5" downrod	15.67"	12.23"
Fan w/12" downrod	23.17"	19.73"
Fan w/18" downrod	29.17"	25.73"
Fan w/24" downrod	35.17"	31.73"
Fan w/36" downrod	47.17"	43.73"
Fan w/48" downrod	59.17"	55.73"
Fan w/60" downrod	71.17"	67.73"
Fan w/72" downrod	83.17"	79.73"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan.

BLADES:

A set of four 21" reversible, cherry/satin nickel blades is included.

CONTROL OPTIONS:

C24 hand-held remote control with canopy-style receiver unit (RECFP5220) is included. Frequency code settings are located in both transmitter and receiver units. Push button remote control has 3 fan speeds, infinite light levels and off button. Reversing switch located on fan housing. Optional C25 wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTION:

Single-bulb downlight fixture with one 50-watt GU10/MR16 halogen bulb is included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Akira™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry locations only.

Available Finishes

SN	Satin nickel with reversible cherry/satin nickel blades
----	---

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	144	4295	93	0.38	46
Med	100	3024	120	0.34	25
Low	57	1652	165	0.24	10



celebrating 25 years

**10983 Bennett Parkway
Zionsville, IN 46077**

Toll Free (888) 567-2055

FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website @ www.fanimation.com

*Copyright 2010 Fanimation, Inc.
All Rights Reserved*



2010/01