

The Cumulos™

FP4820PW



SPECIFICATION SHEET




celebrating 25 years

Product Specifications subject to change



CUMULOS™
FP4820PW
Ceiling Fan

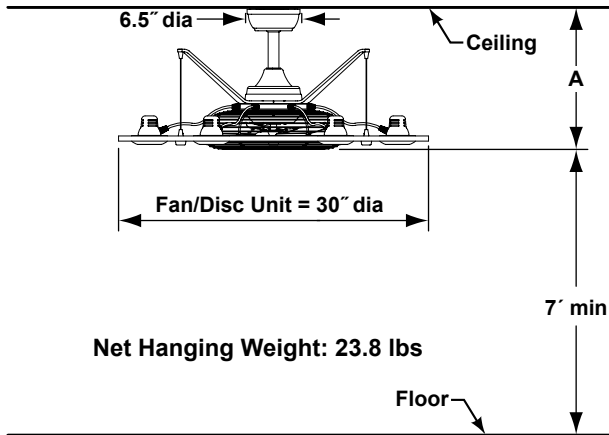

	A
Fan w/6" downrod	14.00"
Fan w/12" downrod	20.00"
Fan w/18" downrod	26.00"
Fan w/24" downrod	32.00"
Fan w/36" downrod	44.00"
Fan w/48" downrod	56.00"
Fan w/60" downrod	68.00"
Fan w/72" downrod	80.00"

Available Finish	
PW	Pewter

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

90 x 25 motor is designed for optimal performance with this fan.

FAN SPEEDS:

High—1,364 rpm; Med—1,040 rpm; Low—774 rpm

CONTROL OPTIONS:

C24 hand-held remote control with canopy-style receiver unit (RECAN68) is included. Frequency code settings are located in both transmitter and receiver units. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional C25 wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Fan assembly features 6 downlights (GU10 base MR-16 bulbs, 25 watt max - included). Maximum downlight wattage not to exceed 150 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.



celebrating 25 years

**10983 Bennett Parkway
Zionsville, IN 46077**

Toll Free (888) 567-2055

FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website @ www.fanimation.com

*Copyright 2010 Fanimation, Inc.
All Rights Reserved*



2010/01