

THE TORRENTOTM

FP920 Series



SPECIFICATION SHEET



INSTALLATION REQUIREMENTS

Base of fan must be secured to floor using one of the following methods: Three 3/8"-7/16" lag screws can be utilized for wood floor applications. 1/2" concrete expansion bolts or 3/8"-7/16" lag bolt/lag shields can be utilized for concrete floor applications.

ELECTRICAL REQUIREMENTS


Floor fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 8 ft power cord with 3-prong plug is included with this fan.

MOTOR ASSEMBLY UNIT


Single motor unit: 120 VAC, 60 Hz, 0.90 amps. Reversible, 3-speed pull-chain included. Approximate speeds (will vary depending on blade options): High - 118 rpm; Medium - 78; Low - 54 rpm.

Specifications subject to change

The Torrento™ Fan Assembly - FP920**

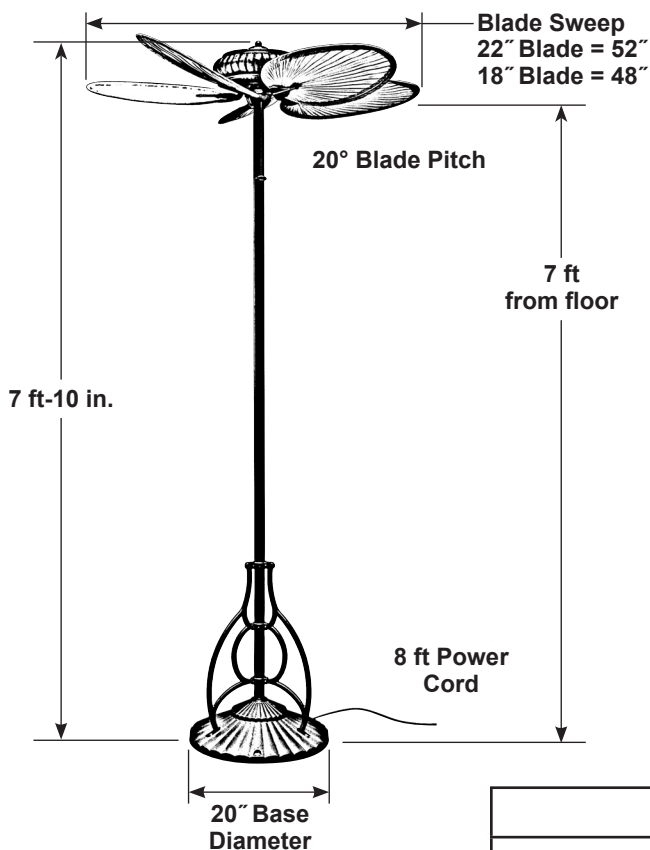

**Available Fan Finishes	
AG	Aged Copper
AZ	Aged Bronze
LT	Latte
TB	Textured Black

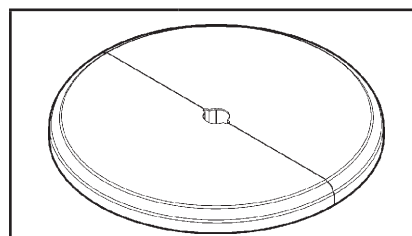

Optional Table Accessory

TA92AG	Aged Copper
TA92AZ	Aged Bronze
TA92LT	Latte
TA92TB	Textured Black

Available Plastic Blades

Palm Leaf	BPP1	Natural - 22" Wide Oval
Palm Leaf	BPP4	Natural - 22" Narrow Oval
Woven Bamboo	BPD1A	Antique - 22" Wide Oval
Woven Bamboo	BPD4A	Antique - 22" Narrow Oval
Woven Bamboo	BPD4BL	Black - 22" Narrow Oval
Traditional Wood	BPW10CY	Cherry - 21" Narrow
Traditional Wood	BPW10WO	Washed Oak - 21" Narrow

MOTOR:

120 Volts, 60 Hz, 0.90 amps.

FAN SPEED:

3-speed pull-chain with reversing switch (on the motor). Approximate speeds (depending on blade selection)
1st Pull-High – 145 rpm; 2nd Pull-Med – 95 rpm; 3rd-Low – 60 rpm;

BLADE OPTIONS:

Wet-Location (Plastic - BP, BPD & BPW Series) Palm, Bamboo, and Wood blades are available (sold separately in sets of 5). See Catalog or visit our website, www.fanimation.com for more information.



10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055

FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com