


Fixture Name: Hidalgo 1051-BA1 SBZ

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
to be filled out by retailer

Circular Mounting strap	1ea 	Box Screw Mounting screws	2sets 	Deco Nut (round nut)	2ea 
Green Ground Screw	1ea 	Wire Connector	3ea 		


Part Needed	_____	Quantity	_____
Part Needed	_____	Quantity	_____
Reason why Comments	(missing, scratched, broken glass, bent, bad finish)		_____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

- Slide the Glass Shade (H) over Socket (F) and secure Glass Shade (H) by threading the Socket Ring (J) to Socket (F) until tight.
- Install the light bulbs in accordance with the fixture's specifications.
(DO NOT EXCEED THE MAXIMUM WATTAGE RATING)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

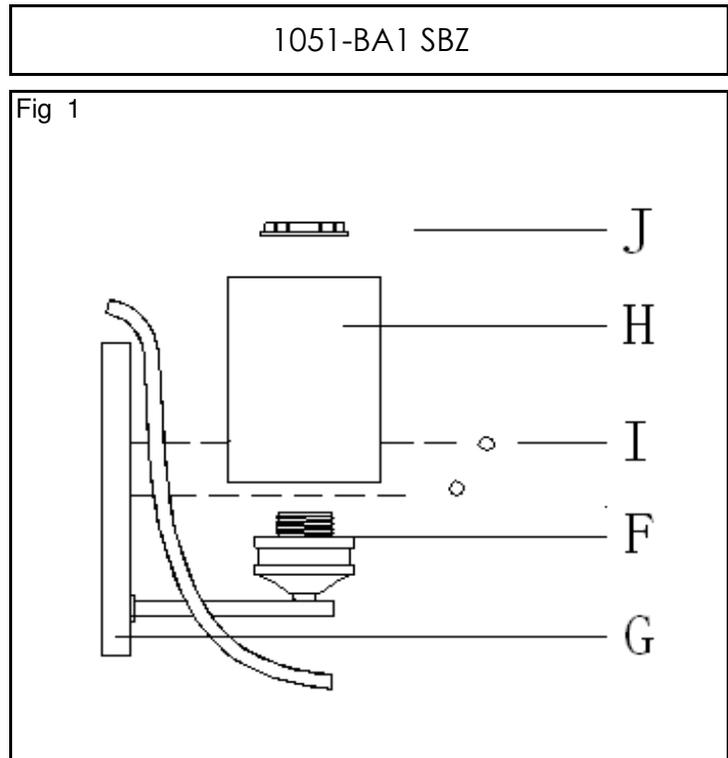

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. The Circular Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that match the hole spacing in your fixture Back Plate (G) and thread the two Mounting Screws (C) half way into the Mounting Strap (B) facing down, Secure in place with hex nuts. These will have their threaded ends protrude through the two holes in the Back Plate (G).
4. Place the Mounting Strap (B) over the junction box.
5. Attach the Mounting Strap (B) to the Junction Box using the two mounting screws (A). Tighten the screws (A) securely with screw driver.

CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
 7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Plate (B) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig.3)

9. After tucking these wire connections neatly into the Junction Box and place the fixture Front Plate (G) over the two Mounting Screws (C) and secure against the Mounting Plate by threading two Deco Nuts (I) over the two Mounting Screws (C) until snug against the wall.
 10. Install the light bulbs and glass shade as per the fixture assembly sheet.
- YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

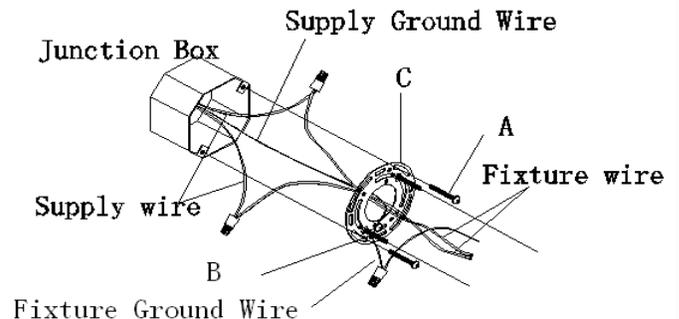


Fig. 2

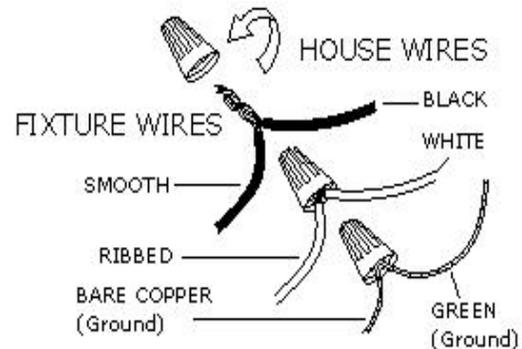


Fig. 3

