




Family: Harbor | Item No. 2579 AR/TT




**Drawing 1 - Strap Detail**

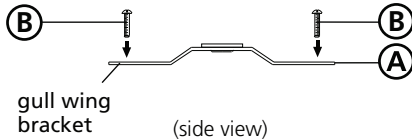

**Drawing 2 - Fixture Mounting**

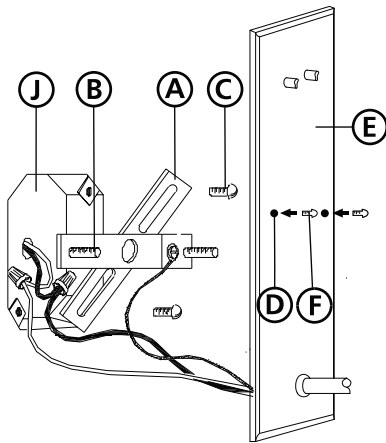

**Drawing 3 - Glass Replacement**

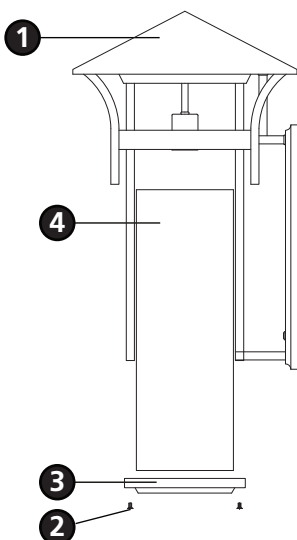

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first mounting the mounting strap to the junction box, making all necessary electrical connections, and then mounting the fixture to the wall.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. Prepare mounting strap (**A**) by threading the two 1 1/4" long mounting screws (**B**) into the back of the gull wing bracket - see **Drawing 1**.
  - Be sure the holes into which the screws are threaded match the spacing of holes (**D**) in the backplate (**E**) - see **Drawings 1 and 2**.
2. Attach mounting strap (**A**) to junction box (**J**) using two 1" screws (**C**) provided.

**3**

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (**I.S. 18**) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

**4**

1. Mount the fixture by slipping the holes (**D**) in the back plate (**E**) over the screws (**B**) in the mounting strap (**A**) - see **Drawing 2**.
2. Hold fixture against wall and thread ball knobs (**F**) onto end of screw (**B**) showing through the backplate (**E**).
3. Fixture can now be lamped accordingly.

Glass Replacement Instructions - see **Drawing 3**.

1. Remove the four screws (**2**) from the bottom of the cage (**1**). Making sure to support the bottom plate (**3**) during this operation.
2. Drop bottom plate (**3**) down and glass (**4**) will drop down with the plate.
3. Place new glass (**4**) into bottom plate (**3**) and slip back up into fixture.
4. Replace the screws (**2**) removed earlier.

Note: Maximum wattage for 2579 fixture is 100 watts per bulb.

4.4.08