



## Drawing 1 - Glass Installation



## Drawing 2 - Glass Installation

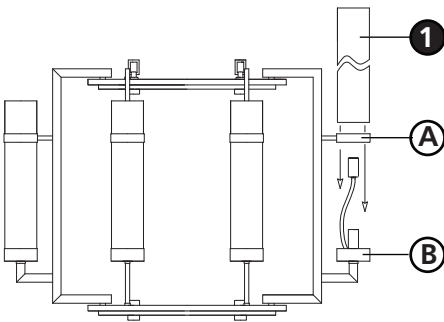

# ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first making all necessary electrical connections, hanging the fixture from the ceiling and then installing fixture glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer to the hanging instruction sheet **(I.S.19-75)** provided to complete installation

2

1. Fixture can now be lamped accordingly.
2. To prevent glass from being scratched or chipped during installation, it is recommended that strips of paper towels or a thin rag be draped over glass ring **(A)** - see **Drawings 1 and 2.**
3. Slip glass **(1)** through ring **(A)** and into glass holder **(B)**.
4. Repeat steps 2-3 for remaining glass.

Note: Maximum wattage for 4096 fixture is 40 watts per bulb.

12.15.08