




Family: Brantley | Item No. 4639 TBK



Drawing 1 - Fixture Assembly

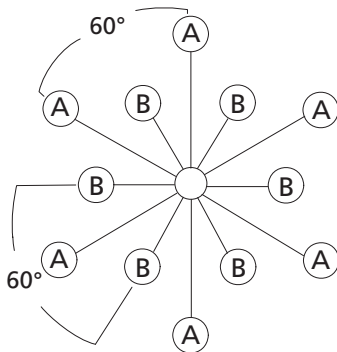

Drawing 2 - Fixture Assembly

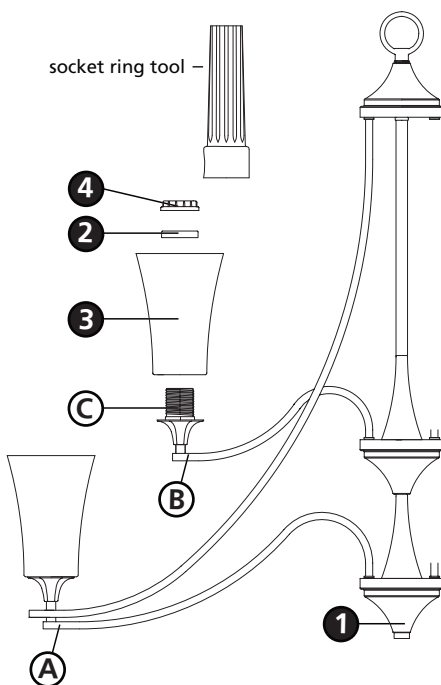

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling and then installing the glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

2

1. To assemble main body, spread arms **(A)** of the body assembly **(1)** until they are equally spaced 60 degrees apart - see **Drawing 1**.
2. Spread arms **(B)** of the body assembly **(1)** until they are equally spaced 60 degrees apart.
3. Please refer to hanging instruction sheet **(I.S. 19)** provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

3

1. Remove socket ring **(4)** and spacer **(2)** from socket **(C)** - see **Drawing 2**.
2. Slip glass **(3)** over socket **(C)**.
3. Slip spacer **(2)** over socket **(C)**.
4. Thread socket ring **(4)** onto socket **(C)**, using socket ring tool provided to secure glass.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4639 fixture is 60 watts per bulb.

3.16.09