




Family: Plantation | Item No. 4143 BB/PZ




**Drawing 1 - Fixture Assembly**

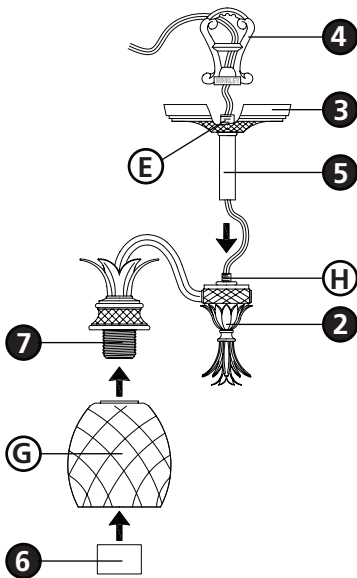

**Drawing 2 - Strap Detail**

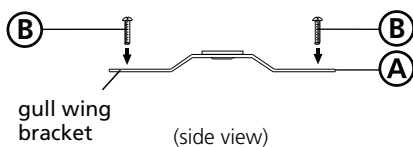

**Drawing 3 - Fixture Mounting**

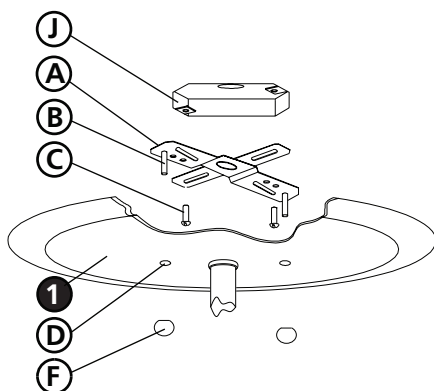

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first determining whether the fixture is to be mounted or hung by chain, assembling the main body of the fixture, making all necessary electrical connections, mounting to or hanging the fixture from the ceiling, and then installing the glass.**

**2**

1. Slip wire through center of tubing (5), located in column assembly (3), onto nipple (H) in main body assembly (2) - see **Drawing 1**.
2. **If fixture is to be hung by chain**, slip wire through center hole of loop (4) and thread onto nipple (E) inside column assembly (3). Please refer to the hanging instruction sheet (I.S. 19) provided to continue installation of this fixture.
3. **If fixture is to be mounted**, prepare gem strap (A) for mounting by threading two screws (B) provided into back of gull wing bracket of gem strap (A) - see **Drawing 2**. Be sure the holes into which the screws are threaded match the spacing of holes (D) in the ceiling pan (1) - see **Drawings 2 and 3**. Mount gem strap (A) to junction box (J), using the two 1" screws (C) provided.

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**3**

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

**4**

1. Hang the fixture by slipping the holes (D) in the ceiling pan (1) over the screws (B) in the mounting strap (A) - see **Drawing 3**.
2. Thread on ball knobs (F) to secure fixture to the ceiling.

**5**

1. To install glass, remove the retaining ring (6) from socket (7) - see **Drawing 1**.
2. Slip glass (G) over socket (7) and thread socket retaining ring (6) onto socket (7).

Note: Maximum wattage for 4143 fixture is 60 watts per bulb.

2.7.08