




Family: Bolla | Item No. 4653 BN/OB



**Drawing 1 - Fixture Assembly**

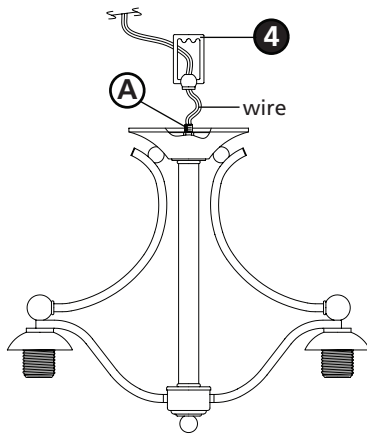

**Drawing 2 - Glass Installation**

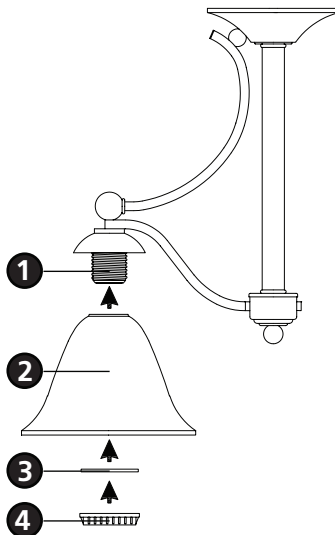

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, mounting the mounting strap to the junction box, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. To assemble main body, slip loop **(4)** along wire and thread onto nipple **(A)** and tighten - see **Drawing 1**.
2. Please refer to the hanging instruction sheet **(I.S. 19)** provided to continue installation of this fixture. Then refer back to this sheet to install glass.

**3**

1. To install glass, remove retaining ring **(4)** from threaded socket **(1)** - see **Drawing 2**.
2. Slip glass **(2)** over threaded socket **(1)** and slip retaining washer **(3)** onto socket **(1)**.
3. Thread socket ring **(4)** onto socket **(1)** to secure glass **(2)**.
4. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4653 fixture is 75 watts per bulb.

2.7.08