



- 1) Turn off power.
 - 2) Attach mounting strap to outlet box. (Screws not provided.)
 - 3) Screw threaded pipe into mounting strap.
 - 4) Grounding instructions: (See Illus. A or B).
 - A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
 - B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) After following the above steps.
- Never connect ground wire to black or white power supply wires.

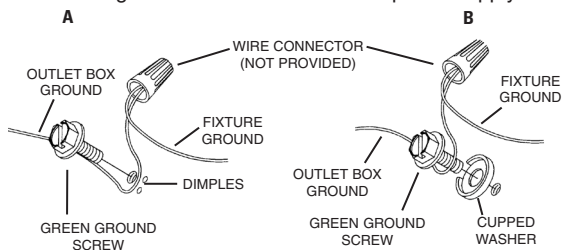

- 5) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 6) Push fixture to ceiling so threaded pipe can pass through hole and secure in place using lockwasher and threaded cap.
- 7) Insert lamps.
- 8) Set glass inside trim ring.
- 9) Raise glass with trim ring up to fixture placing glass in between threaded studs on edge of fixture..
- 10) Pass trim brackets over threaded studs to secure glass to fixture.
- 11) Screw finials onto threaded studs to secure glass to fixture.