


12V LED/INCANDESCENT PATH & SPREAD

PIERCED SCROLLWORK

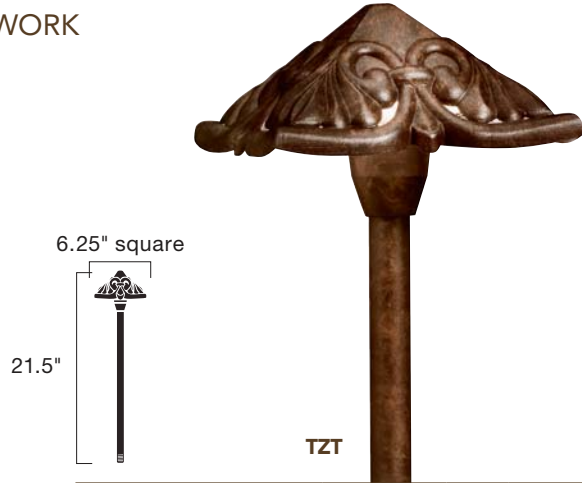

TZT

15437 TZT

ADJUSTABLE CRESCENT



OZ

15330 OZ

Ordering Guide & Finish	15437 TZT	15330 OZ																		
Housing	Cast Aluminum	Brass																		
Lamp Base	12V T5 wedge base socket	12V S8 wedge base socket																		
Supplied Lamp	16.25-W(VA) 921X (17025) Xenon light source Power usage at 12V AC input VA MAX: 16.25-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)																		
Incandescent Lamp Options	11.6-W(VA) 912X (17023) 6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021)	18.5-W(VA) 3155K (15599 CLR)																		
LED Lamp Options	2W (18039-18041) see page 137. Compares up to 16W Xenon.	2W (18036-18038) see page 137. Compares up to 18.5W Krypton.	2W (18122-18123) see page 138. Compares up to 18.5W Krypton.																	
Wiring	24" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	42" of usable #18-2, SPT-1-W leads. Cable connectors supplied.																		
Mounting Access. (Included)	8" In-ground slotted stake	8" In-ground slotted stake																		
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket																		
Notes	N/A	Adjustable shade on this versatile fixture allows it to be used as a path or accent light or for wall washing. Brass will develop natural patina over time.																		
Photometric with Supplied Lamp	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
	Foot Candles	11.04	6.99	3.14	1.56	0.44	0.10	0.05	0.03	-	Foot Candles	15.18	9.98	4.13	1.52	.6	.22	.03	-	-