


12V LED/INCANDESCENT PATH & SPREAD

MICA MISSION

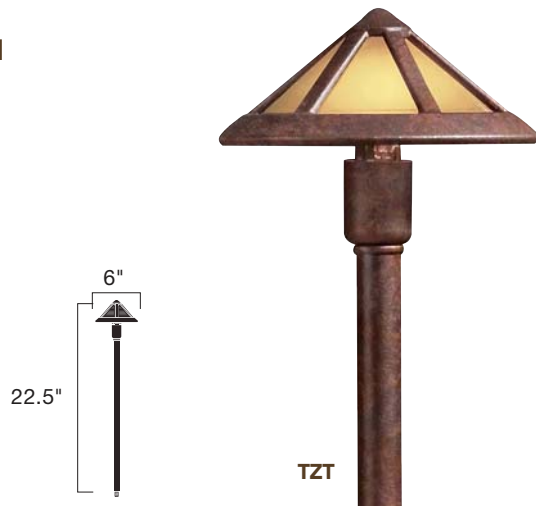

TZT

15450 TZT

CONCORD LANTERN



OB

15334 OB

Ordering Guide & Finish	15450 TZT	15334 OB		
Housing	Cast Aluminum with mica finished glass panels	Brass with stainless steel rods and seedy glass		
Lamp Base	12V T5 wedge base socket	12V T5 wedge base socket		
Supplied Lamp	11.6-W(VA) 912X (17023) Xenon light source Power usage at 12V AC input VA MAX: 16.25-W(VA)	6.5-W(VA) 918X (17022) Xenon light source Power usage at 12V AC input VA MAX: 6.5-W(VA)		
Incandescent Lamp Options	16.25-W(VA) 921X (17025) 6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021)	4-W(VA) 901X (17022)		
LED Lamp Options	N/A	2W (18039-18041) see page 137. Compares up to 16W Xenon.		
Wiring	22" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	20" of usable #18-2, SPT-1-W leads. Cable connectors supplied.		
Mounting Access. (Included)	8" In-ground slotted stake	8" In-ground slotted stake		
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket		
Photometric with Supplied Lamp	Distance from Light	0' 1' 2' 3' 4' 5' 6' 7' 8'	Distance from Light	0' 1' 2' 3' 4' 5' 6' 7' 8'
	Bottom	1.34 1.61 1.63 0.86 0.46 0.28 0.07 0.07 -	Foot Candles	20.9 4.7 .6 .2 - - - -