



12V LED/INCANDESCENT PATH & SPREAD

COTSWOLD™
CONVERTIBLE
HEIGHT TIKI

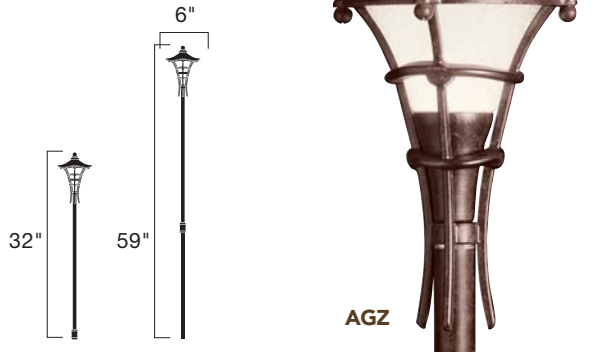

15421 AGZ

CATHEDRAL
BOLLARD

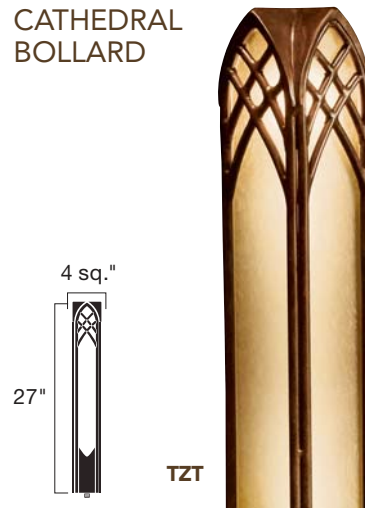

15449 TZZ

Ordering Guide & Finish	15421 AGZ	15449 TZZ																			
Housing	Cast Aluminum with weathered white glass	Aluminum with dark citrine glass																			
Lamp Base	12V T5 wedge base socket	12V T5 wedge base socket																			
Supplied Lamp	11.6-W(VA) 912X (17023) Xenon light source Power usage at 12V AC input VA MAX: 16.25-W(VA)	11.6-W(VA) 912X (17023) (2) Xenon light source Power usage at 12V AC input VA MAX: 16.25-W(VA)																			
Incandescent Lamp Options	16.25-W(VA) 921X (17025) 6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021)	16.25-W(VA) 921X (17025) 6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021) (2 required)																			
LED Lamp Options	2W (18039-18041) see page 137. Compares up to 16W Xenon.	2W (18039-18041) see page 137. Compares up to 16W Xenon.	2W (18120-18121) see page 138. Compares up to 16W Xenon.																		
Wiring	24" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	22" of usable #18-2, SPT-1-W leads. Cable connectors supplied.																			
Mounting Access. (Included)	8" In-ground slotted stake	8" In-ground slotted stake																			
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket	N/A																			
Photometric with Supplied Lamp	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	(at 32" height)	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
	Foot Candles	.25	.3	.2	.1	-	-	-	-	-	-	Distance from Light	0.44	1.81	1.26	0.70	0.39	0.25	0.16	.012	.010