



6 LED FIXTURE WITHOUT BRACKET

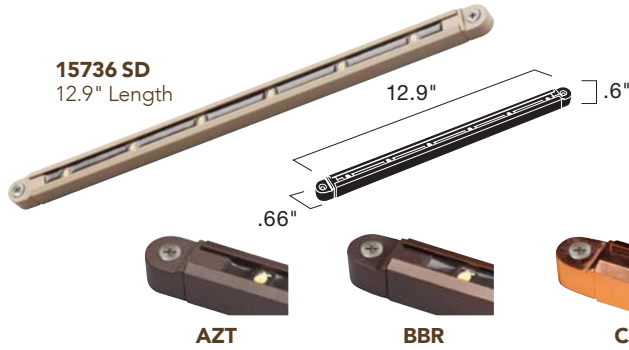

9 LED FIXTURE WITHOUT BRACKET

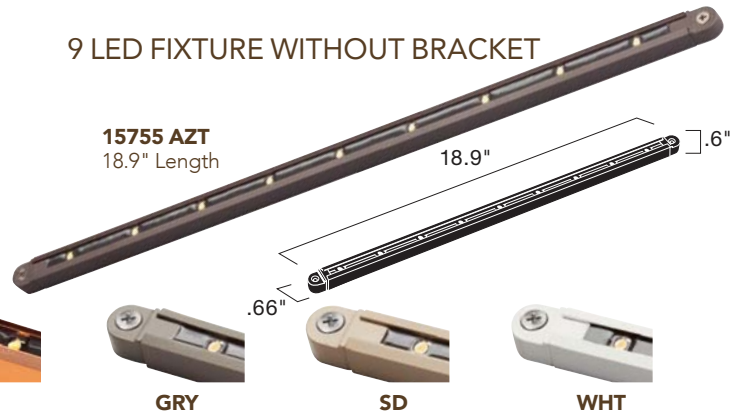

	15736	15755
Ordering Guide	15736 AZT30 – Textured Architectural Bronze 15736 BBR30 – Bronzed Brass 15736 CO30 – Unfinished Copper 15736 GRY30 – Textured Gray 15736 SD30 – Textured Sand 15736 WHT30 – Textured White	15755 AZT30 – Textured Architectural Bronze 15755 BBR30 – Bronzed Brass 15755 CO30 – Unfinished Copper 15755 GRY30 – Textured Gray 15755 SD30 – Textured Sand 15755 WHT30 – Textured White
Housing	Aluminum, Brass, Copper Plated Brass	Aluminum, Brass, Copper Plated Brass
Light Source	6 Integrated High Output Nichia® LED, tightly binned for color uniformity, and constant current driver	9 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver
Beam Spread	55°	55°
Color Temp. (CCT) & CRI	3000K (-200/+125) / 80s CRI	3000K (-200/+125) / 80s CRI
Power Usage at 12V AC Input VA and Watts	1.4 W, 2.4 VA Multiply fixture VA by the number of fixtures used to determine size of transformer	2.2 W, 3.7 VA Multiply fixture VA by the number of fixtures used to determine size of transformer
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology	9V-15V AC/DC with no loss in output due to constant current technology
Lumen Maint.	Tested to an L-70 of 40,000 hours	Tested to an L-70 of 40,000 hours
Delivered Lumens & Efficacy	3000K = 88 Lm 3000K = 61 Lm/W	3000K = 132 Lm 3000K = 62 Lm/W
Wiring	70" of usable #18-2, SPT-1-W leads. Pro series wire connectors supplied.	70" of usable #18-2, SPT-1-W leads. Pro series wire connectors supplied.
Mounting Access.	Stainless steel masonry bracket mounting screws (included)	Stainless steel masonry bracket mounting screws (included)
Optional	15718 SS – 6 LED Accessory Bracket	15719 SS – 9 LED Accessory Bracket
Notes	Subjected to Highly Accelerated Life Testing. 3rd party reliability testing. Not for use with electronic transformers. Copper will naturally patina over time.	Subjected to Highly Accelerated Life Testing. 3rd party reliability testing. Not for use with electronic transformers. Copper will naturally patina over time.
Fixture Photometric (fc)	Mounting Height	0' 1' 2' 3' 4'
	Foot Candles at 12"	65.10 9.74 0.60 0.22 0.14
	Foot Candles at 24"	19.64 9.15 2.72 0.48 0.24
	Foot Candles at 36"	9.16 5.82 2.74 1.00 0.30
Fixture Photometric (fc)	Mounting Height	0' 1' 2' 3' 4'
	Foot Candles at 12"	80.40 12.00 1.08 0.36 0.21
	Foot Candles at 24"	26.81 13.13 3.81 0.91 0.39
	Foot Candles at 36"	13.51 8.43 4.55 1.78 0.62



	15718 SS - 6 LED FLAT MOUNT BRACKET	15719 SS - 9 LED FLAT MOUNT BRACKET
Fits	Fits 15736, 15746 (6 LED)	Fits 15755, 15756 (9 LED)
Dimensions	Width – .66", Length – 12.9", Height – .60"	Width – .66", Length – 18.9", Height – .60"
Finish.	Stainless Steel	Stainless Steel
Notes	Mounting hardware included. U.S. Patent Pending	Mounting hardware included. U.S. Patent Pending