

# INSTALLATION INSTRUCTIONS

Item # P861-084 05/10/2012

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.  
FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN  
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the crossbar.
3. Attach the Circular Strap (A) to the Outlet Box using the two screws (B). The side of the Circular strap marked "GND" must face out.
4. Thread the two Threaded Studs (C) into the pre-drilled holes in the Circular Strap (A) spaced the same distance apart as the hole in the Canopy (G).
5. Place the Light Assembly (L) through inside the Metal Shade (K) and lift upward.
6. Adjust Cable (J) according to the desired distance from ceiling to hang fixture. Push the Button (I) at the outside face of the Canopy (G) to extend cable. Pulling the cable without pushing the Button (I) can restrict the cable, tightly secure cable with Strain Relief Bushing (D) by loosening both screws from Strain Relief Bushing (D) adjust to desired length then secure the screws. Cut cable to length if necessary.
7. Determine desired distance from ceiling to hang the fixture, and if necessary, cut cord to length plus five inches. Run the wired cord through the Canopy (G).
8. Install the Strain Relief Bushing (E) by unscrewing the Screw (F) and pushing the cord through the Bushing (E) about 5" of cord is exposed. Tighten screw from the Strain Relief Bushing (E). (You may need someone to hold the fixture while installing the Strain Relief Bushing.) The fixture can now hang from the Strain Relief Bushing.
9. Carefully cut and remove approximately 4" of the outer sheathing from cord and strip 1/2" of the wire ends bare to expose the copper strands.

### CONNECTING THE WIRES (Fig. 2)

10. At this point, connect the electrical wire as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the circular strap using the Green Screw provided.
11. After wires are connected, tuck them carefully into the ceiling junction box, then place Canopy (G) onto Studs (C) then secure with Knurled Knobs (H).
12. **CAUTION: DO NOT CONNECT THE ELECTRICAL WIRES TO THE STEEL SUPPORT CABLE (J)**

### FINISHING THE INSTALLATION (Fig. 1)

13. **Install the light bulb (NOT INCLUDED) in accordance with the fixture's specifications. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!) 150W E26 LAMP**  
Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1


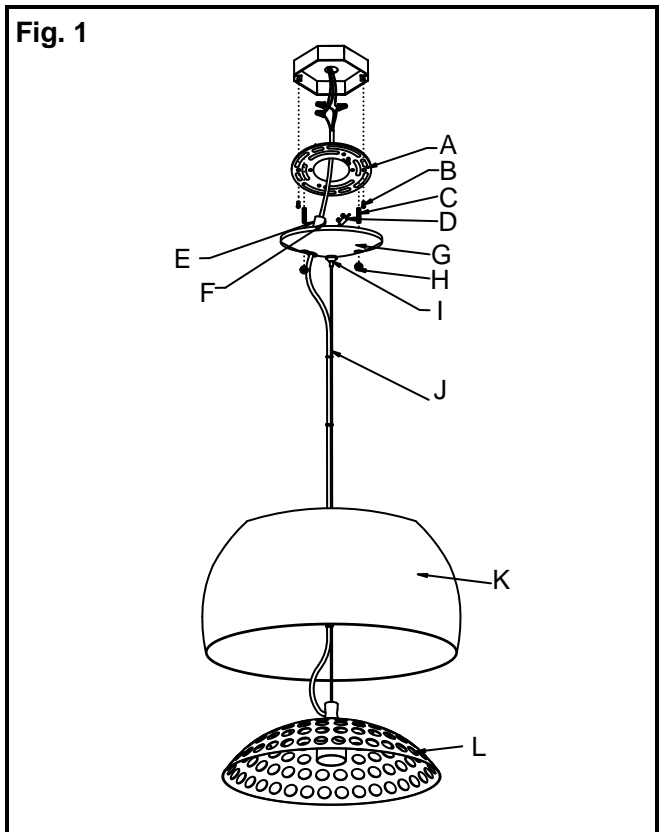


Fig. 2



**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

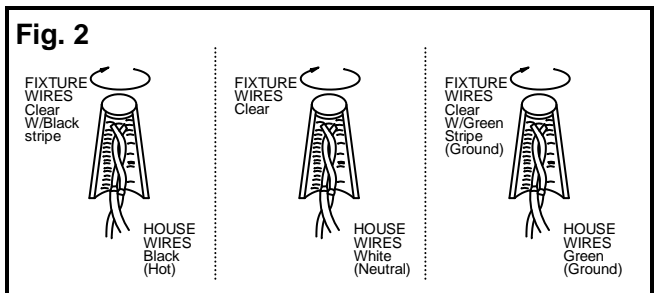