




Compact Fluorescent

**Back Plate for  
Wall Pockets  
Standard Ballast**

**Wall Sconce**

Type \_\_\_\_\_  
-30  
P7200

Catalog No.	Finish	Lamping	Socket	Dimensions (Inches)	
	White			A	B
P7200	-30	2-13w Twin CF	GX23	7-3/4	4-3/4

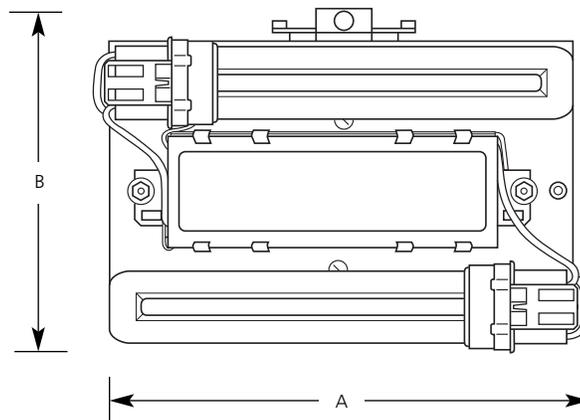

**Specifications:**

General

- Surface mounted back plate
- Painted White finish
- Steel construction
- Locking thumb nut to retain diffuser

Electrical

- 120V HPF magnetic ballast
- Pre-wired

Labeling

- UL-CUL listed

Mounting

- Wall mounted
- Mounts vertically or horizontally depending on diffuser used
- Covers outlet box
- Universal outlet box mounting plate supplied
- Secured to mounting plate with two cap nuts

Progress Lighting  
Post Office Box 5704  
Spartanburg, South Carolina  
29304-5704

www.progresslighting.com

Rev. 1/04




Compact Fluorescent

**Back Plate for  
Wall Pockets  
Electronic Ballast**

**Wall Sconce**

Type \_\_\_\_\_  
-30EB  
P7200

Catalog No.	Finish	Lamping	Socket	Dimensions (Inches)	
	White			A	B
P7200	-30EB	2-13w Quad CF (4-pin)	G24q-1	7-3/4	4-3/4

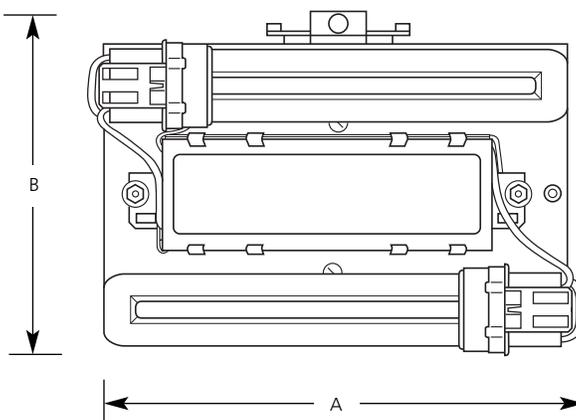

**Specifications:**

General

- Surface mounted back plate
- Painted White finish
- Steel construction
- Locking thumb nut to retain diffuser

Electrical

- 120/277V HPF electronic ballasts
- Pre-wired

Labeling

- UL-CUL listed

Mounting

- Wall mounted
- Mounts vertically or horizontally depending on diffuser used
- Covers outlet box
- Universal outlet box mounting plate supplied
- Secured to mounting plate with two cap nuts

Progress Lighting  
Post Office Box 5704  
Spartanburg, South Carolina  
29304-5704

www.progresslighting.com

Rev. 3/07



Compact Fluorescent


**Back Plate for  
Wall Pockets  
Energy Star**

**Wall Sconce**

Type \_\_\_\_\_

-30STRWB  
P7200

Catalog No.	Finish		Lamping	Socket	Dimensions (Inches)	
	White				A	B
P7200	-30STRWB		2-13w Quad CFL (4-pin)	G24q-1	7-3/4	4-3/4

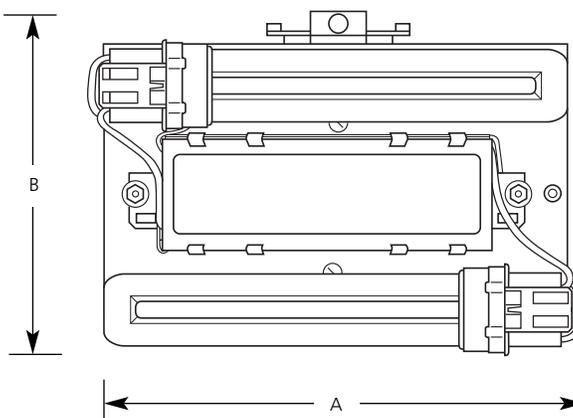

**Specifications:**

General

- Surface mounted back plate
- Painted White finish
- Unit complies with Energy Star requirements
- Locking thumb nut to retain diffuser
- Steel construction

Electrical

- Pre-wired
- 120v NPF electronic ballast
- G24q-1 sockets

Labeling

- UL-CUL listed

Mounting

- Wall mount
- Mounts vertically or horizontally
- Back plate covers a standard 4" octagonal recessed outlet box
- Universal outlet box mounting plate supplied
- Secured to mounting plate with two cap nuts



Progress Lighting  
Post Office Box 5704  
Spartanburg, South Carolina  
29304-5704

www.progresslighting.com