



Incandescent -Halogen

Illuma-Flex – Track Head Glass Shade

Track

Low Voltage


Type _____

-09A - 174A -09B -174B -09R -174R -174W -174PA

P6124 ☐

Finish

Catalog No.	Brushed Nickel	Glass		Lamping	Dimensions (Inches)		
					A	B	C
P6065	-09PW	Etched Linen/opal		12v T4 35w (Incl)	5-1/2	5	72

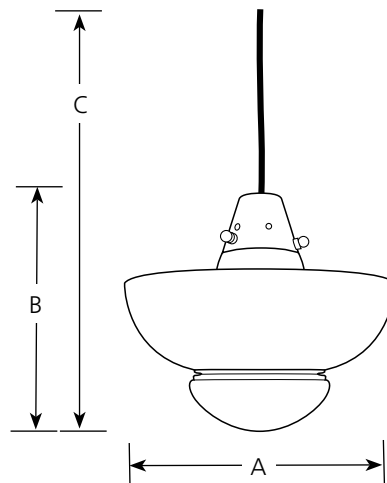

Specifications:

General

- Flex track mini-pendant
- Etched Linen and opal inverted bowl glass shade.
- Plated brushed nickel (-09) finish
- One 35w T4 lamp included
- Mounts anywhere along Illuma-Flex track sections, or on monopoints
- Includes adapter that allows unit to be mounted to P8516 transformer for Alpha track system also.
- Matching line voltage pendants available

Mini pendant Support

- Attaches to Illuma-Track, P8516 transformer on Alpha track, or on P8780 monopoint with supplied fitter
- Can also be mounted on P8794 Designer monopoint by direct wiring.
- A small wiring compartment is located just below the fitter to allow adjustment of cord length

- Cord is Teflon coated copper wire with a silicon sleeve that matches the brushed nickel finish

Electrical

- Attachment to 12 volt Illuma-Flex track
Remove top cap, slide onto track from below, replace cap and tighten to clamp unit to track
 - Attachment to Alpha Track
Remove cord from Illuma-Flex fitter, attach to Alpha fitter (P8777) included. It attaches to P8516 Alpha track transformer (Order separately)
 - Attachment to P8780 quick connect monopoint
Attach cord to P8777 fitter and twist into position on the monopoint
 - Attachment to P8794 designer monopoint
Directly wire cord into canopy
 - Lamp has a GY6.35 bi-pin base
- #### Labeling
- UL-CUL listed

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com