

INSTALLATION INSTRUCTIONS

For Model 8951

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the 2 Mounting screws (E) to the mounting strap(C),(You can adjust the length of the screws if necessary.)
4. Attach the mounting strap(C)to the outlet box (A) (not supplied)by using the 2 screws(B) provided with the Outlet Box (A).

5. CONNECTING THE WIRES (Fig. 2)

At the point, connect the electrical wires as follows:

Connect the black wire from the fixture to the black (hot) house wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting strap by using the green screw provided. Tuck the wire connections neatly into the junction box.

6. Place fixture (G) over the two screws (E) from the mounting strap (C) and secure with the 2 cap Nuts (F),
7. To prevent moisture from entering the outlet box and causing a short ,use clear caulking(i.e. Indoor/Outdoor Silicon Sealant) to outline the outside of fixture backplate where it meets the wall leaving a space at the bottom to allow moisture a means to escape.(Fig.3)
8. Install bulb. (Type-A. not supplied).
9. Attach the cage (H) to the Fixture (G) and secure with the 2 screws (I).
10. Turn on the power at fuse or circuit box.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

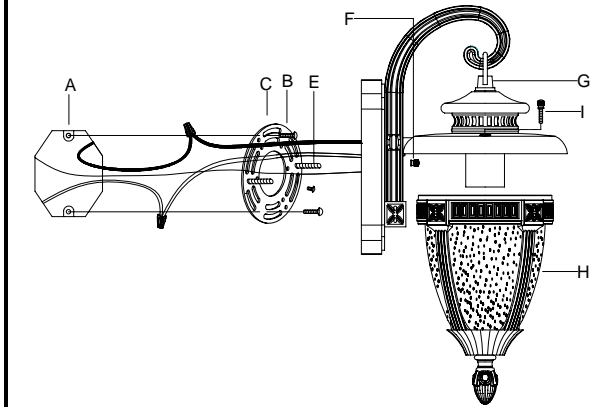


Fig. 2

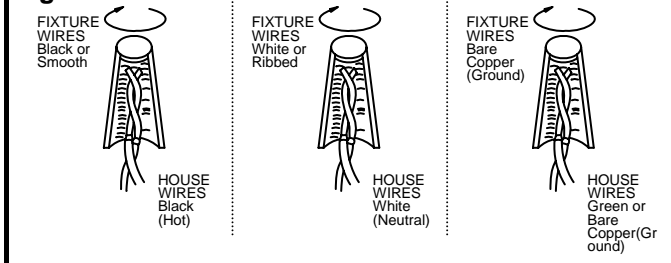


Fig. 3

