


ASSEMBLY AND INSTALLATION INSTRUCTIONS

VL5148-3, VL5148-4, VL5148-2

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

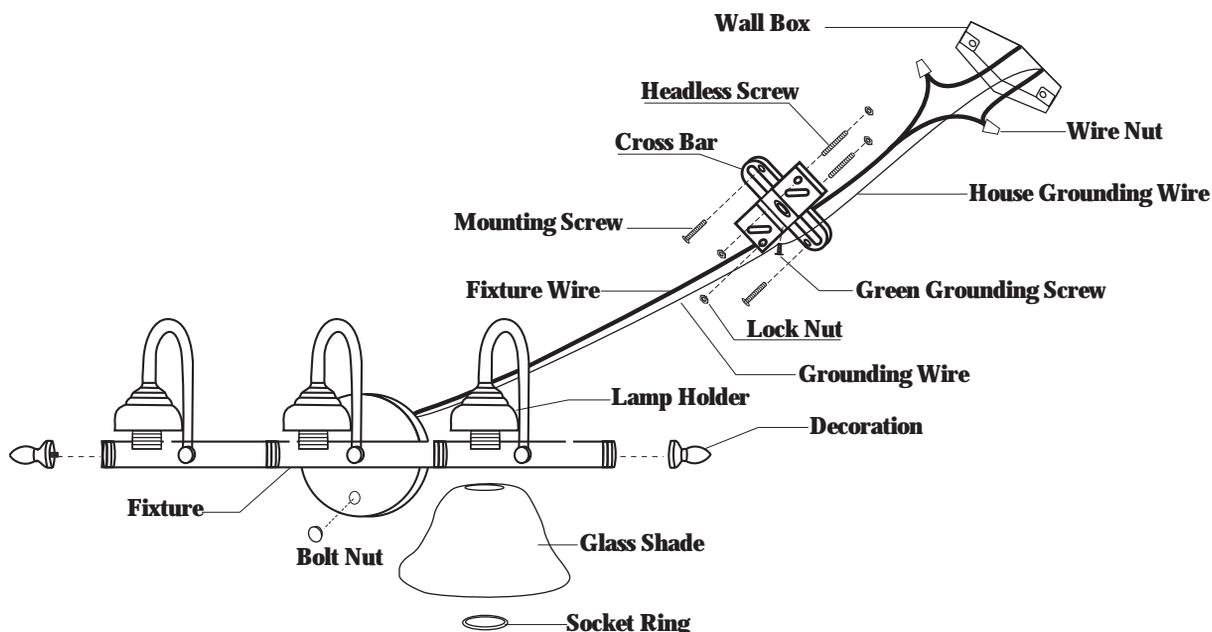

Installation Steps

1. Attach 2 headless screws to the cross bar, and secure with 4 lock nuts.
2. Attach the cross bar to the wall box by using 2 mounting screws.
3. Make wire connections with wire nuts:
 - Black wire from fixture to black wire from power source.
 - White wire from fixture to white wire from power source.
 - Attach the grounding wire and house grounding wire to the cross bar with a green grounding screw.Carefully tuck wires back into the wall box.
4. Attach the fixture to the cross bar by inserting the headless screws, and secure with the bolt nuts.
5. Attach the glass shade to the lamp holder, and then secure with socket rings. Secure the decorations to the fixture.
6. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the package.)
7. Turn on the power at fuse or circuit box.