

Black Solid



White Solid



Stainless Solid  
(Flush to Cabinet)



Stainless Solid  
(Flush to Door)



Stainless Solid  
(No Flange)

## Key Features

- Makes crescent shaped cubes approx. 1/2" W x 3/4" H x 2 1/4" L
- Produces up to 23 lb of ice per day
- Stores 12 lb of ice
- On / off switch
- White interior
- Stainless steel handle (7/8" diameter)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- No drain required


## Model Details

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UMCR014-SC02A	230 / 50	Field Reversible (Flush to Cabinet)	Stainless Solid	66 lb (30 kg)
UMCR014-SD02A	230 / 50	Field Reversible (Flush to Door)	Stainless Solid	66 lb (30 kg)
UMCR014-SS02A	230 / 50	Field Reversible (No Flange)	Stainless Solid	66 lb (30 kg)
UMCR014-BC02A	230 / 50	Field Reversible (Flush to Cabinet)	Black Solid	66 lb (30 kg)
UMCR014-WC02A	230 / 50	Field Reversible (Flush to Cabinet)	White Solid	66 lb (30 kg)

## Accessories

Model	Description	Finish	Shipping Weight
ULAWATERHOOKUP	Braided water supply line kit	N/A	2 lb
U-POWERCORD-2056	Power Cord 230 V Great Britain/Ireland	N/A	N/A
U-POWERCORD-2256	Power Cord 230 V Australia/New Zealand	N/A	N/A
U-POWERCORD-2667	Power Cord 230 V Continental Europe	N/A	N/A
U-POWERCORD-3071	Power Cord 230 V China	N/A	N/A
U-POWERCORD-3111	Power Cord 230 V India	N/A	N/A


**MCR014 • 14" Crescent Ice Maker • 230V Marine Collection**

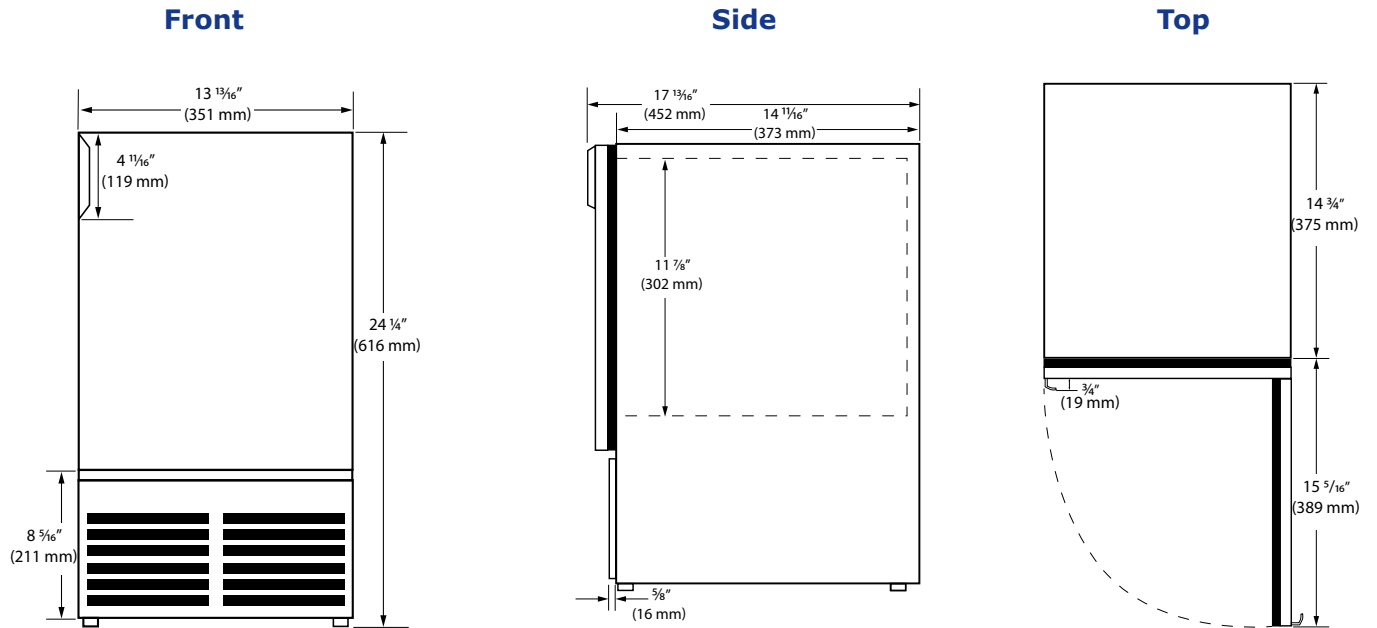


**Specifications**

Model	MCR014
Amps: Running	1.2 amps
Amps: Max Start Up	6 amps
Ice Production Per Day	23 lb (10,4 kg)
Ice Storage	12 lb (5,4 kg)
Dimensions (NF): Product Depth	17" (432 mm)
Dimensions (NF): Product Height	25 1/16" (637 mm)
Dimensions (NF): Product Width	14" (356 mm)
Dimensions (FC): Product Depth	17" (432 mm)
Dimensions (FC): Product Height	25 1/8" (638 mm)
Dimensions (FC): Product Width	15 1/8" (384 mm)
Dimensions (FD): Product Depth	17" (432 mm)
Dimensions (FD): Product Height	26 1/16" (662 mm)
Dimensions (FD): Product Width	15 15/16" (405 mm)
Energy Consumption: Avg. Per Year	TBD
Refrigerant Type	R600a (.09 oz)
Energy Efficiency Class	TBD
Climate Class	TBD
Noise Emissions	TBD
Foam Blowing Agent	TBD

**Back**

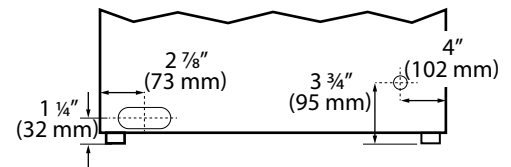

**Cabinet Cut-Out**

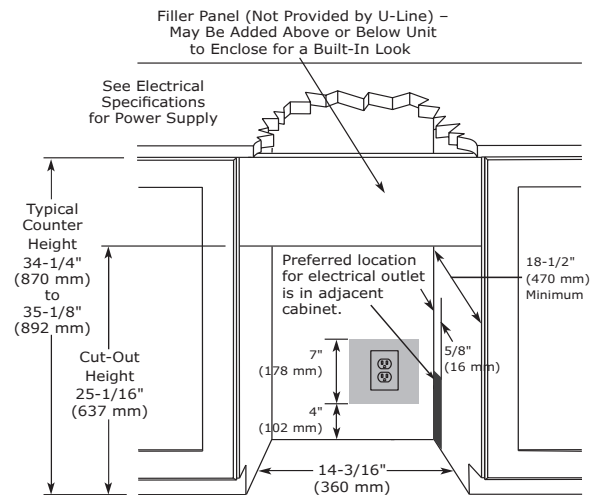

**Installation Notes**

- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow

**Warranty**

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + **Additional 1 Year (parts & labor) warranty at no cost with product registration**

See complete warranty for details



Please visit [u-line.com](http://u-line.com) to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • [sales@u-line.com](mailto:sales@u-line.com) • [u-line.com](http://u-line.com)