



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

T8 Fluorescent T8U Series

Features

All purpose direct wire fluorescent undercabinet or display light where a compact design and low profile is required. The T8 lamp source is 1-3/8" deep and 4" wide in various lengths and is available with rocker switch and convenience outlet. Low profile applications include kitchens, study areas, displays and computer stations. Standard knockouts are located on top, back or ends for direct connection. A direct wire UL listed connector is included and is suitable for 3/8" flexible conduit or 3 wire Romex.



Construction

Housing is die-formed of 22-gauge steel. Separate hinge-able service tray allows for easy installation and snaps into position without hardware. Power connections are made inside service tray.

Finish

All exposed metal parts are post painted lighting grade white gloss enamel paint.

Diffuser

White acrylic diffuser with external ribbing snap-fits into housing.

Electrical

This unit is wired with UL listed electronic residential grade normal power factor for 120V/60 Hz AC operation. PH = magnetic pre-heat ballast with starter.

Lamping

For use with T8 linear fluorescent bi-pin lamps; not included. Models with "T" suffix; T8 linear fluorescent bi-pin lamps included.


Certification

Fixtures are cULus listed for damp locations and carry a UL rating for undercabinet mounting.

Options (consult factory)

High power factor ballast

Specifications and dimensions
subject to change without notice.

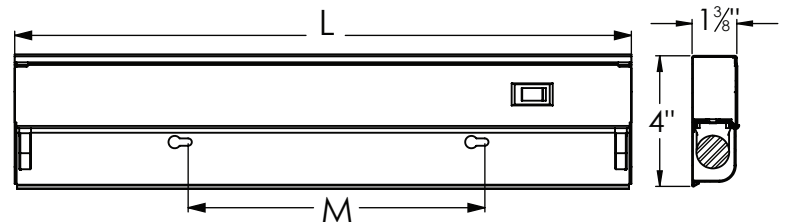

Ordering Information:

Standard	Switch & Outlet	Pre-heat	Lamp & Switch	Qty.	Lamp	L	W	D	M
T8U15		T8U15PH	T8U15PHRT	1	F15T8	18"	4"	1-3/8"	13"
T8U17	T8U17RCO			1	F17T8	24"	4"	1-3/8"	19"
T8U25	T8U25RCO			1	F25T8	36"	4"	1-3/8"	31"
T8U32	T8U32RCO			1	F32T8	48"	4"	1-3/8"	43"

Pre-heat Closet	Qty.	Lamp	L	W	D	M
T8U15PHCLT	1	F15T8	18"	4"	1-3/8"	13"
T8UPHCLT-PS	1	F15T8	18"	4"	1-3/8"	13"