AFX

LOCATION	DATE
PREPARED BY	QUANTITY
COMMENTS	FIXTURE TYPE
CATALOG NUMBER	

Xenon Line Voltage Linkable & Direct Wire NXL Series

Features

The NXL Premium Series is ideal for undercabinet lighting in kitchens, study areas and displays with its low profile design. The housing is available in 5 different lengths ranging from 8" to 40" to handle most application requirements. Color options include a white and bronze finish as well as actual stainless steel to accommodate most decors. The NXL Series is line voltage, includes 20W lamps and is linkable up to 560 watts. In addition, the units can be direct wired. Unique hinged tempered glass and wiring compartment, as well as captive mounting screws, provide a smoother installation setup. Knockouts spaced every 4" on the top and bottom offers maximum wiring flexibility.

The following accessories are included with each fixture:

- 5' cord and plug 12" connecting cable BX/NM cable connector
- Direct connector for unit to unit connection

Construction

Fixture housing is made from 22-gauge roll-formed steel. Metal enclosed hinged service tray allows for easy installation and locks into position with half-turn latch fasteners. Tempered glass panel is also hinged, allowing convenient access to the lamp compartment. Power connections are made inside the service tray or with included cord and plug.

Finish

All exposed metal parts are post painted lighting grade and

available in the following finishes:

White Gloss Enamel (WH) • Stainless Steel (SS) • Oil-Rubbed Bronze (RB)

Diffuser

The diffuser is made of clear tempered 1/8" thick glass with frosted interior surface.

Electrical

This unit is wired for 120V line voltage operation. High/low switch included.

Lamping

The following lamping options are available, lamps included. Rated 5,000 hours.

- (1) 20W Xenon Bi-Pin (4) 20W Xenon Bi-Pin
- (2) 20W Xenon Bi-Pin (5) 20W Xenon Bi-Pin
- (3) 20W Xenon Bi-Pin

Certification


Fixtures are cULus listed for damp locations and carry a UL rating for undercabinet mounting.

Specifications and dimensions subject to change without notice.

Ordering Information:

White	Oil-Rubbed Bronze	Stainless	Qty.	Lamp	L	W	D	м	Accessories	s (Ordered Separately)
NXL120WH	NXL120RB	NXL120SS	1	20W Xenon Bi-Pin	8"	3-3/4"	1"	4-7/8"	White	
NXL220WH	NXL220RB	NXL220SS	2	20W Xenon Bi-Pin	14"	3-3/4"	1"	10-7/8"	XLCC12WH	Modular 12" interconnect cord
NXL320WH	NXL320RB	NXL320SS	3	20W Xenon Bi-Pin	22"	3-3/4"	1"	18-7/8"	XLP60WH	60" Cord & Plug
NXL420WH	NXL420RB	NXL420SS	4	20W Xenon Bi-Pin	32"	3-3/4"	1"	28-7/8"	XLHBWH	Hardwire Box
NXL520WH	NXL520RB	NXL520SS	5	20W Xenon Bi-Pin	40"	3-3/4"	1"	36-7/8"	Black	
I	1	•			•				XLCC12BL	Modular 12" interconnect cord
									XLCP60BL	60" Cord & Plug



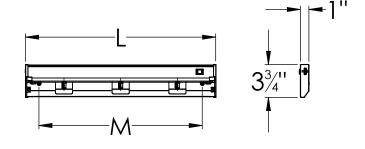

XLHBBL

Hardwire Box