



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Rowan LED Outdoor Sconce RWNW Series

Features

This LED light is ideal for security and general lighting. Provides lighting in residential, commercial, and hospitality applications. Fixture can be mounted horizontally or vertically to a standard junction box (not included).

Construction

Back pan is die formed from 22-gauge steel. All steel metal housing construction with sealed diffuser. Power supply connections must be made in a junction box (not included).

Finish

Metal housing is available in textured grey or textured bronze finish.

Diffuser

Diffuser is made of 0.10" thick standard white acrylic.

Electrical

Input 120-277 VAC 60 Hz.
Compatible with 0-10V dimmers.
Minimum starting temp -4° F/-20° C

LED

Integrated LED modules capable of producing:
22W = 2000 source lumens, 1100 delivered lumens
42W = 4000 source lumens, 2360 delivered lumens
Adjustable Choice 3000K, 3500K, 4000K (CCT).
Rated for 50,000 Hrs. 90 CRI.

Certification

cETLus certified for wet locations.
*ADA

Warranty


Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

**Specifications and dimensions
subject to change without notice.**

Ordering Information:

	LED	Source Lumens	Delivered Lumens	Adjustable CCT	H	W	D	MC
*RWNW052020LAJD2TG	22W	2000	1100	3000K/3500K/4000K	20"	5"	3-3/8"	10"
RWNW073640LAJD2TG	42W	4000	2360	3000K/3500K/4000K	36"	7"	4-3/8"	18"

	LED	Source Lumens	Delivered Lumens	Adjustable CCT	H	W	D	MC
*RWNW052020LAJD2BZ	22W	2000	1100	3000K/3500K/4000K	20"	5"	3-3/8"	10"
RWNW073640LAJD2BZ	42W	4000	2360	3000K/3500K/4000K	36"	7"	4-3/8"	18"

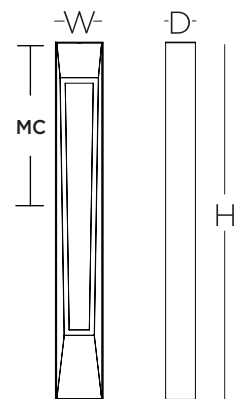

MC - Mounting Center