



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Slim Round LED Surface Mount Disc Light SLMF Series

Features

This ultra low profile, flat back design, mimics the look of recessed lighting without the need for housings. Products can be used in various applications including corridors, closets, bath, showers, hallway, kitchen and anywhere general lighting is needed. Wall or ceiling mount.



Construction

Aluminum housing. Mounts to standard junction box (not included). Power supply connections must be made inside junction box.
6-3/8" - Mounting Center is 2-3/4" apart for J-box with mud ring style.
7-1/2" - Mounting Center is 3-1/2" apart for octagon J-box application only (without mud ring).

Finish

White finish.

Diffuser

Frosted acrylic.

Electrical

Direct wired, 120V AC with Driver-on-Board technology.
Dimmable down to 10% of full scale with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

Lamping

Fixture includes a LED modules capable of producing:
10W = 640 delivered lumens, 785 source lumens
15W = 990 delivered lumens, 1380 source lumens
3000K (CCT). 50,000 Hrs. 90 CRI.

Certification

cETLus listed
ENERGY STAR® Qualified
Title 24/JA8 Compliant
Wet location rated for indoor use.
Outdoor wet location rated for covered ceiling mount applications ONLY (not recommended for any other outdoor use).
Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.


**Specifications and dimensions
subject to change without notice.**



SLMF04L30D1WH

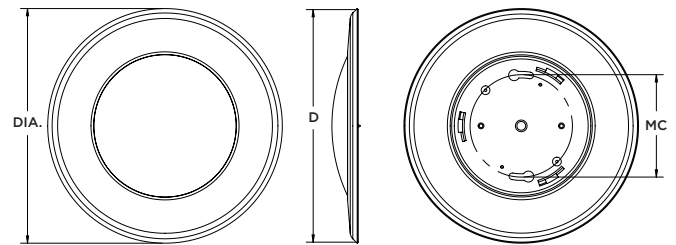

SLMF06L30D1WH

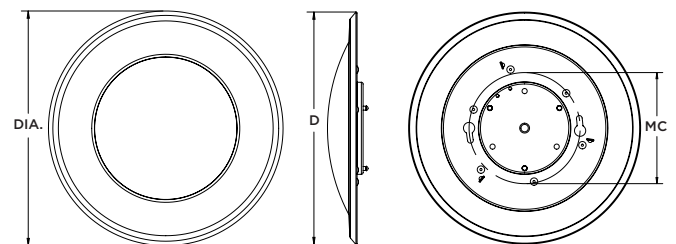

Ordering Information:

White	LED	Delivered Lumens	Source Lumens	CCT	DIA.	D	MC
SLMF04L30D1WH	10W	640	785	3000K	6-3/8"	3/4"	2-3/4"
SLMF06L30D1WH	15W	990	1380	3000K	7-1/2"	1-1/8"	3-1/2"