



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

LED Undercabinet T5L2 Series

Features

All purpose direct wire LED undercabinet light. Low profile applications include kitchens, study areas, displays and computer stations. Standard knockouts are located on top, back and ends for direct connection. A direct wire UL listed connector is included for use with 3/8" flexible conduit or 3-wire Romex.

Construction

Housing is die-formed of 22-gauge steel. Separate hinge service tray allows for easy installation and snaps into position without hardware. Power supply connections must be made inside the fixture.

Finish

All exposed metal parts are post painted lighting grade white or oil-rubbed bronze paint.

Diffuser

Smooth white acrylic diffuser snap-fits into housing.

Electrical

Input 120 VAC/60 Hz.
Compatible with TRIAC and ELV dimmers.
On/off switch included.

LED

Integrated LED in 3000K color temperature.
Rated 50,000 hrs., 90 CRI.


Certification

Fixtures are cETLus listed for indoor damp locations.
ENERGY STAR® Qualified.
T24/JA8 Compliant.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

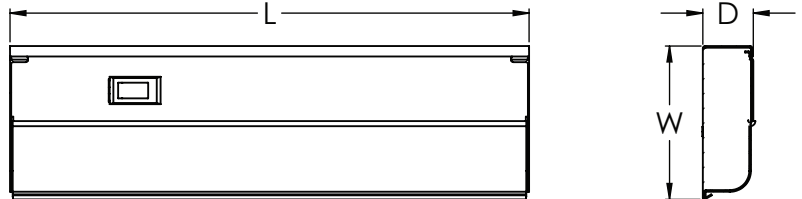

Ordering Information:

Size	Finish		Type	Lumens			L	W	D
	White	Oil-Rubbed Bronze		3000K	LPW				
9 in.	T5L2-9RWH		4.5W SMT-Array	220	44	9"	3-1/2"	1-1/8"	
12 in.	T5L2-12RWH	T5L2-12RRB	5W SMT-Array	315	63	12"	3-1/2"	1-1/8"	
18 in.	T5L2-18RWH	T5L2-18RRB	7.5W SMT-Array	520	69	18"	3-1/2"	1-1/8"	
21 in.	T5L2-21RWH	T5L2-21RRB	8.5W SMT-Array	570	67	21"	3-1/2"	1-1/8"	
24 in.	T5L2-24RWH	T5L2-24RRB	9W SMT-Array	630	70	24"	3-1/2"	1-1/8"	
33 in.	T5L2-33RWH	T5L2-33RRB	13.5W SMT-Array	950	70	33"	3-1/2"	1-1/8"	
42 in.	T5L2-42RWH	T5L2-42RRB	16.5W SMT-Array	1150	69	42"	3-1/2"	1-1/8"	



ACCESSORY (ORDER SEPARATELY)
LCX-OCC | Occupancy sensor