



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

LED Closet Light T5LC Series



Features

All purpose direct wire LED closet light. Low profile for smaller closets. Standard knockouts are located on top, back or ends for direct connection. A direct wire UL listed connector is included and is suitable for 3/8" flexible conduit or 3-wire Romex.

Construction

Housing is die-formed of 22-gauge steel. Separate hinge service tray allows for easy installation and snaps into position without hardware. Power connections are made inside service tray.

Finish

All exposed metal parts are post painted lighting grade white paint.

Diffuser

Smooth white acrylic diffuser snap-fits into housing.

Electrical

This unit is wired for 120V operation. On/off switch rocker or pull chain switch (included).

Lamping

LED lamping, type SMT array, 4000K non-replaceable, Rated 50,000 hrs., 90 CRI.



Certification

cETLus listed for damp locations
ENERGY STAR® qualified
Title 24/JA8 compliant
FCC compliant
Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.



Warranty

Limited warranty. This fixture guaranteed to be free from defects in materials and workmanship for a period of 5 years from date of purchase.


**Specifications and dimensions
subject to change without notice.**

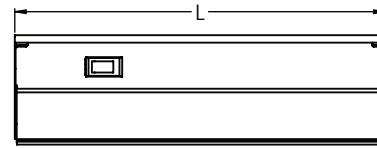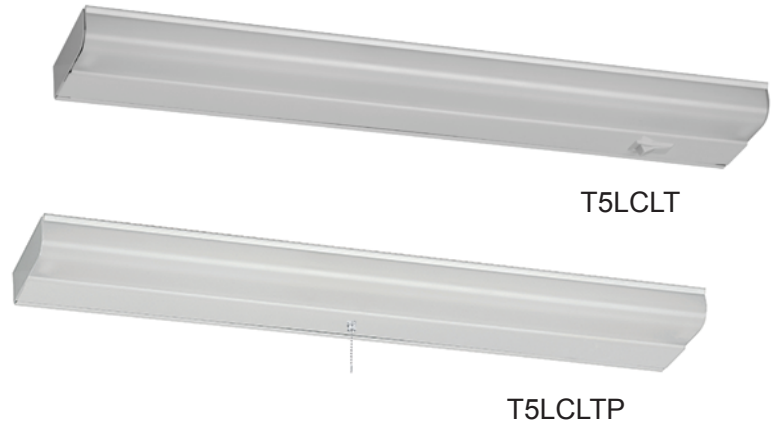

T5LCLT

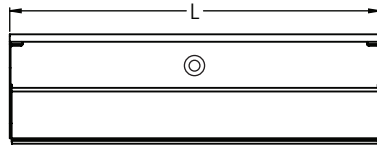

T5LCLTP



Ordering Information:

White	Type	Watt	Lumens	LPW	L	W	D
T5LCLT (on/off rocker switch)	SMT-Array	9	700	77	18"	4-1/2"	1-1/8"
T5LCLTP (on/off pull chain switch)	SMT-Array	9	700	77	18"	4-1/2"	1-1/8"