



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Harper LED Vanity HPRV Series



Features

Simple style elegant geometry. Diffuser is retained with threads for a tight clean appearance against the housing. This product is ideal for corridor and vanity applications. Fixture can be mounted horizontally or vertically to a standard junction box (not included) on a wall.

Construction

The frosted white acrylic diffuser is mounted into a decorative steel cylinder. Wall plate is stamped steel and held in place with 2 screws located within the floating recess. Power supply connections must be made inside a junction box (not included).

Finish

Black, Satin Brass or Satin Nickel finish.

Diffuser

White acrylic diffuser.

Electrical

Input 120-277 VAC 60 HZ.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120 VAC.

LED

Integrated LED modules capable of producing:
25W = 1423 delivered lumens
30W = 1903 delivered lumens
Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
Rated for 50,000 Hrs., 90 CRI.



Certification

All fixtures are cULus listed for indoor damp locations.
ADA Compliant
Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

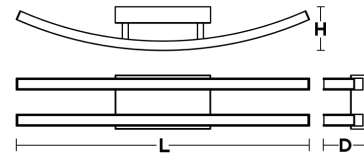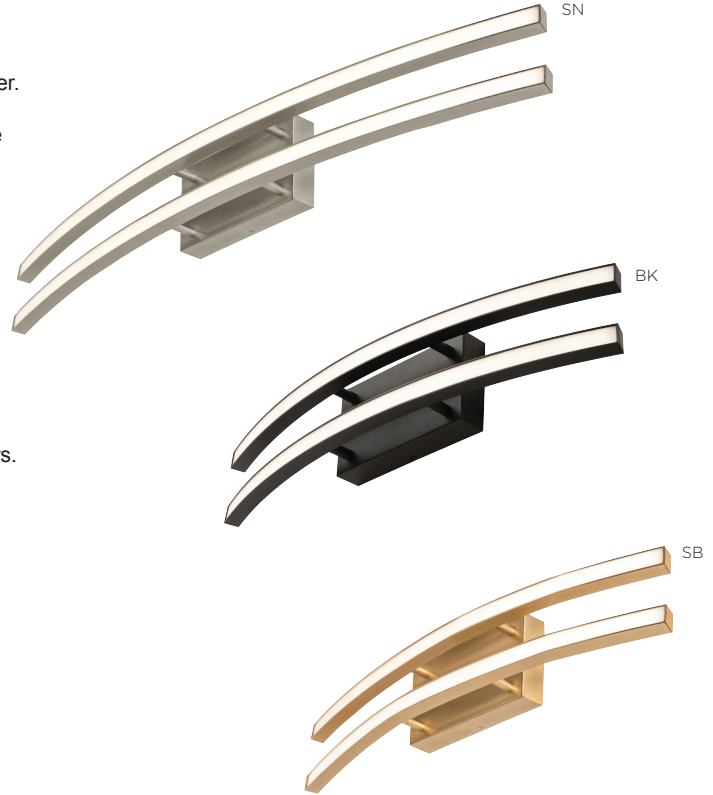

Ordering Information:

Black	Satin Brass	Satin Nickel	LED	Delivered Lumens	Adjustable CCT	L	H	D
HPRV2405LAJUDBK	HPRV2405LAJUSB	HPRV2405LAJUDSN	25W	1423	2700K/3000K/3500K/4000K/5000K	24-3/4"	4-1/2"	3-3/4"
HPRV3605LAJUDBK	HPRV3605LAJUSB	HPRV3605LAJUDSN	30W	1903	2700K/3000K/3500K/4000K/5000K	36-3/8"	4-1/2"	3-3/4"