



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Blake LED Outdoor Sconce BLKW Series

Features

Modern design. Provides lighting in residential, commercial, and hospitality applications. Fixture mounts to standard junction box (not included).

Emergency Back-Up (Optional '-BB')

- 90 minute run-time
- 9.6VDC LiFePO4 battery
- 8 watts

Construction

Aluminum housing. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Black powder coated finish.

Diffuser

Clear glass with frosted edge glass diffuser.

Electrical

Input 120-277 VAC 60 HZ.
0-10V dimming (120-277V), TRIAC (120V).
Minimum starting temp -4° F / -20°C

Lamping

Fixture includes a LED modules capable of producing:
20W = 1000 delivered lumens
26W = 1400 delivered lumens
Adjustable Color Temp: 2700K, 3000K, 3500K, 4000K or 5000K (CCT).
Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cETLus listed for wet locations.
Title 24/JA8 Compliant

Warranty

5 Year Limited Warranty:
Restrictions apply based on location.

**Specifications and dimensions
subject to change without notice.**

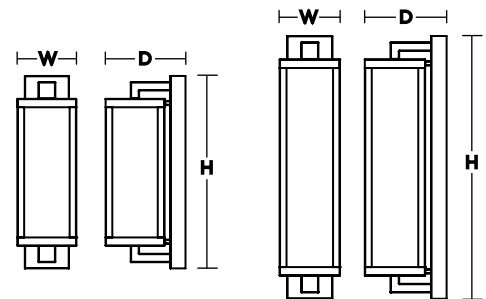

Ordering Information:

Black	Delivered		Adjustable CCT	H	W	D
	LED	Lumens				
BLKW0718LAJUDBK	20W	1000	2700K/3000K/3500K/4000K/5000K	18"	5-1/2"	7-1/2"
BLKW0718LAJUDBK-BB	20W	1000	2700K/3000K/3500K/4000K/5000K	18"	5-1/2"	7-1/2"
BLKW0724LAJUDBK	26W	1400	2700K/3000K/3500K/4000K/5000K	24"	5-1/2"	7-1/2"
BLKW0724LAJUDBK-BB	26W	1400	2700K/3000K/3500K/4000K/5000K	24"	5-1/2"	7-1/2"