

HTL-TW SERIES ORDERING INFORMATION


Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
HTL-TW	24V	2700K-6000K	16.4 ft	255Lm / ft	2.9W / ft	IP54	94+	3.94" (100mm)
HTL-TW-CC	24V	2700K-6000K	Custom Cut	255Lm / ft	2.9W / ft	IP54	94+	3.94" (100mm)

HTL-TW (IP54) 16.4ft Reels include: Attached 3ft Lead Wire / (3) HD Power Feeds / (3) HD Splice Connectors

TUNABLE ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-4PWR-HD	6" HD Power Feed (IP54)
TL-4SPL-HD	HD Splice (IP54)
TL-4JUMP6-HD	6" HD Linking Cable (IP54)
TL-4JUMP24-HD	24" HD Linking Cable (IP54)
WIRE-15-4PIN	15ft (20/4) Wire Spool
INLINE-TW-CTRL	Simple Select In-line Controller (Tunable)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

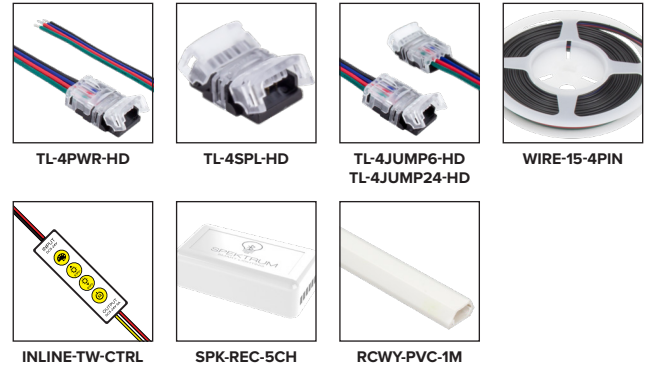


Building a Tunable CCT Trulux System?

See pages (64-65) for compatible Tunable CCT Trulux controllers & accessories

Trulux Tunable CCT Control



Single Zone Push Dial
Wireless RF Wall Controller
TWRP-BATT



4 Zone Touch Slide
DMX Wall Controller
DMX-TW-4Z




4 Zone Remote
RF Remote Control
TWRP-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z

Trulux Tunable CCT Set-up




Push Dial Controller
(Single zone)



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required)




Trulux Tape Light

Smart Receiver Set-up



Smart Device

and / or



Smart Switch
Control



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Smart Receiver



24V Tape Light